


Electrical Engineering

Power System

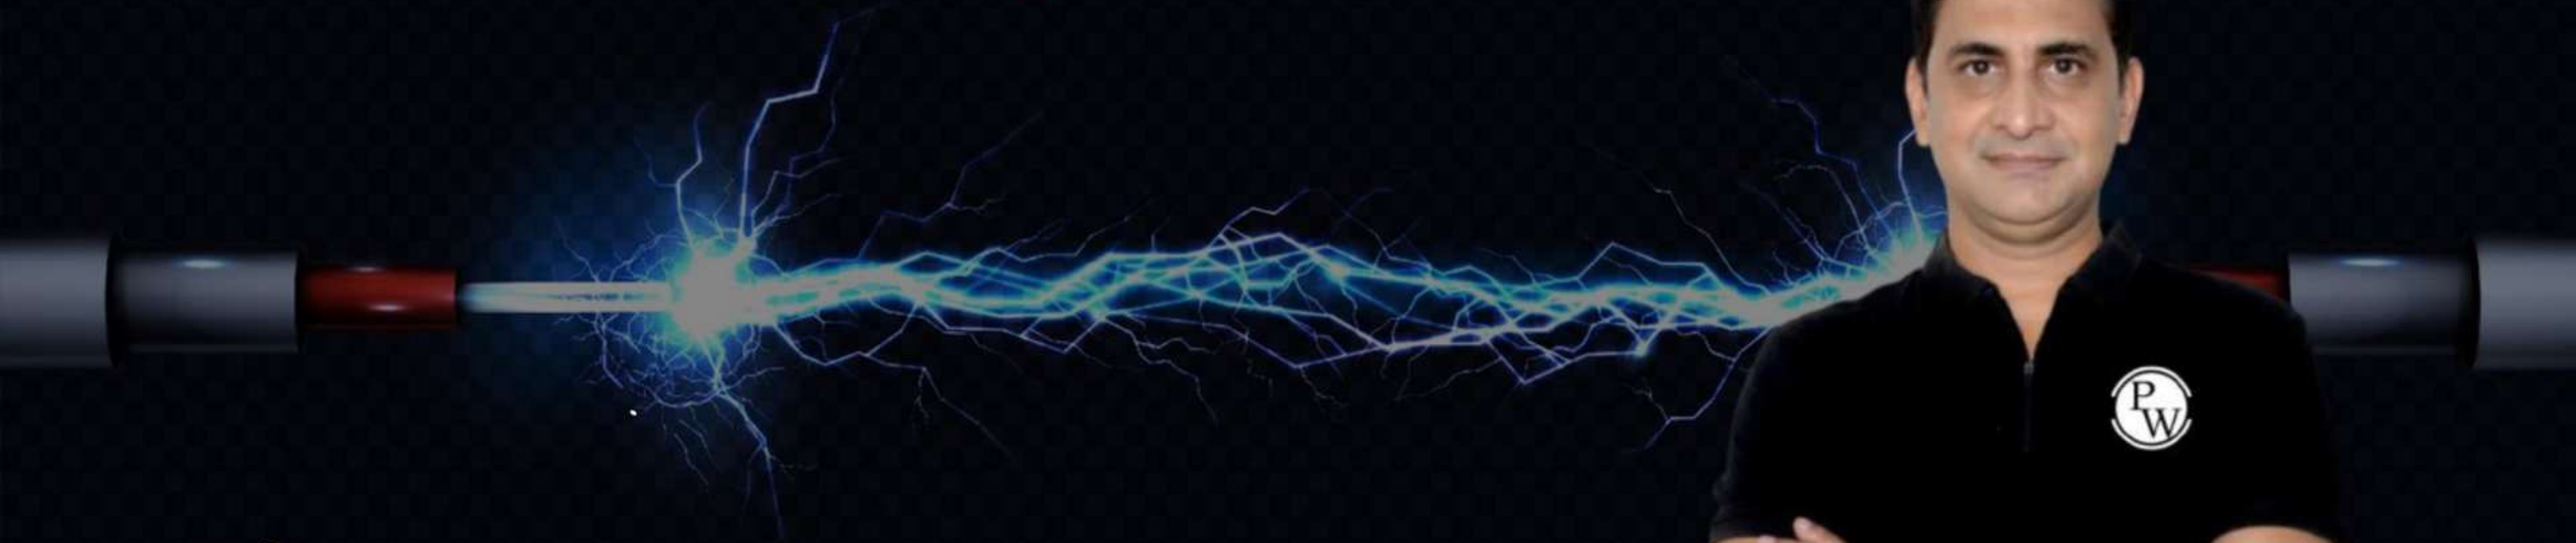

Lecture No.-1

Corona



By- Ajay Gupta Sir




Recap Of previous class

- ✓ 1. Propagation constant
- ✓ 2. Phase constant
- ✓ 3. Surge impedance loading
- ✓ 4. improvement in SIL



Topics to be Covered



- ✓ 1. corona
- ✓ 2. Critical disruptive voltage
- ✓ 3. Visual critical voltage
- 4. corona

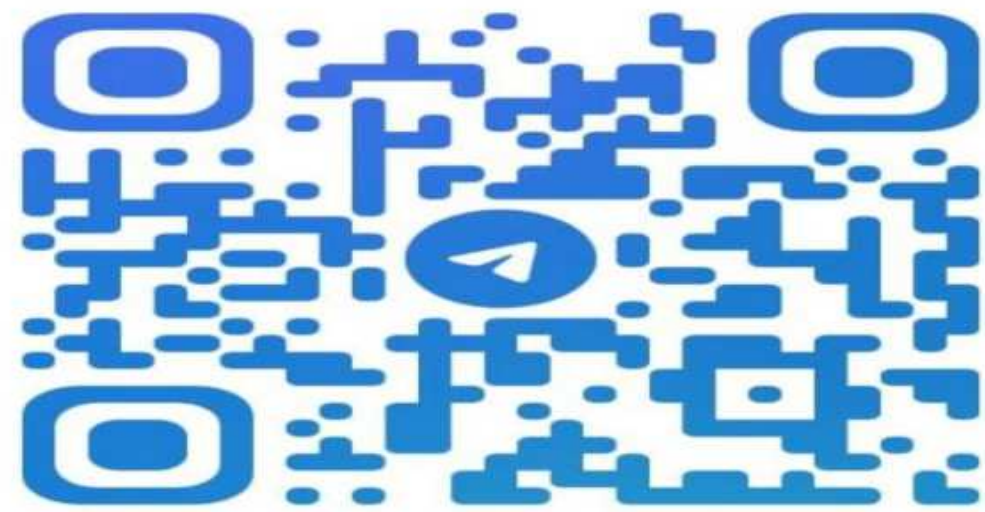

@AJAYGUPTASIRPW

CORONA

Dielectric Strength & Breakdown Voltage:

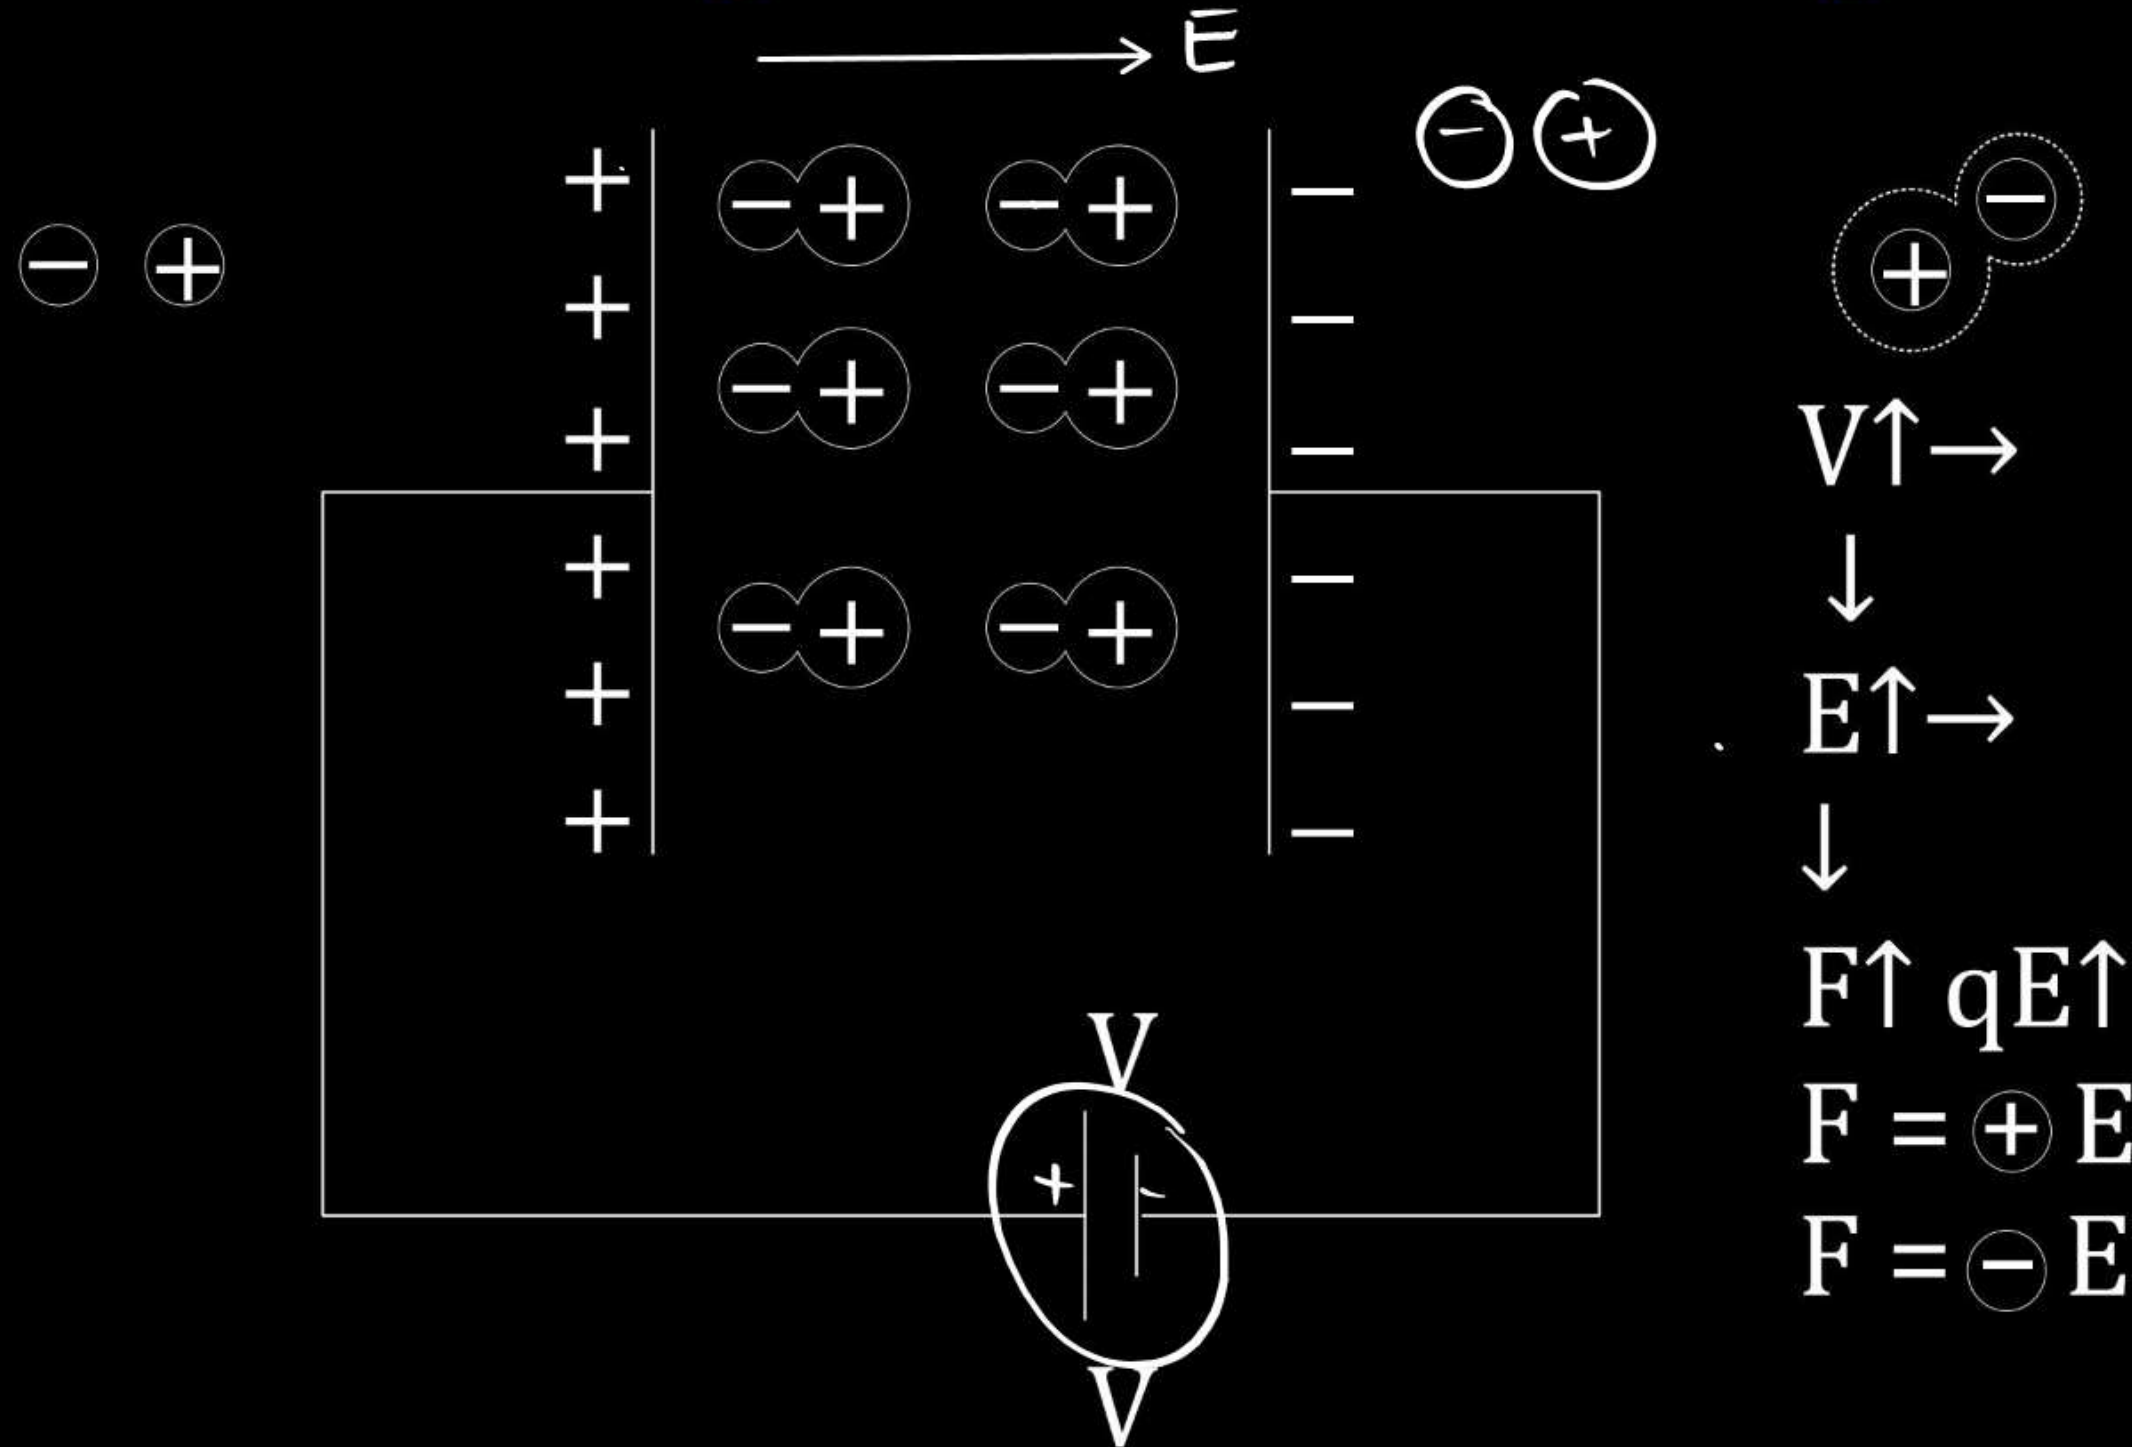

$$F = qE$$

$$F = +E$$

$$F = -E$$

Dielectric strength and breakdown voltage:

- If voltage is increased
- The electric stress E would also increase.
- Due to electric fields the force is exerted on the charge $F=qE$.
- If charge is positive the force would be in the direction of E .
- If charge is negative the force would be opposite to the direction of E


- At a particular electric fields, the force on positive charge (nucleus) and negative electron is become so high that
- The nucleus is not able to hold electron, and electron is separate out from nucleus.
- Now free electron is available for conduction and material is no longer a dielectric material .
- The electric field E at which dielectric material lose its dielectric property is called dielectric strength of dielectric material
- And the voltage this breakdown is occur is called breakdown voltage

➤ The electrical field at which the insulating material is converted into conducting material is called its dielectric strength (V/cm).

⇒ If Applied electrical field $>$ dielectric strength of material
it converts into conductor


⇒ If Applied electrical field $<$ dielectric strength of material
it will be insulator



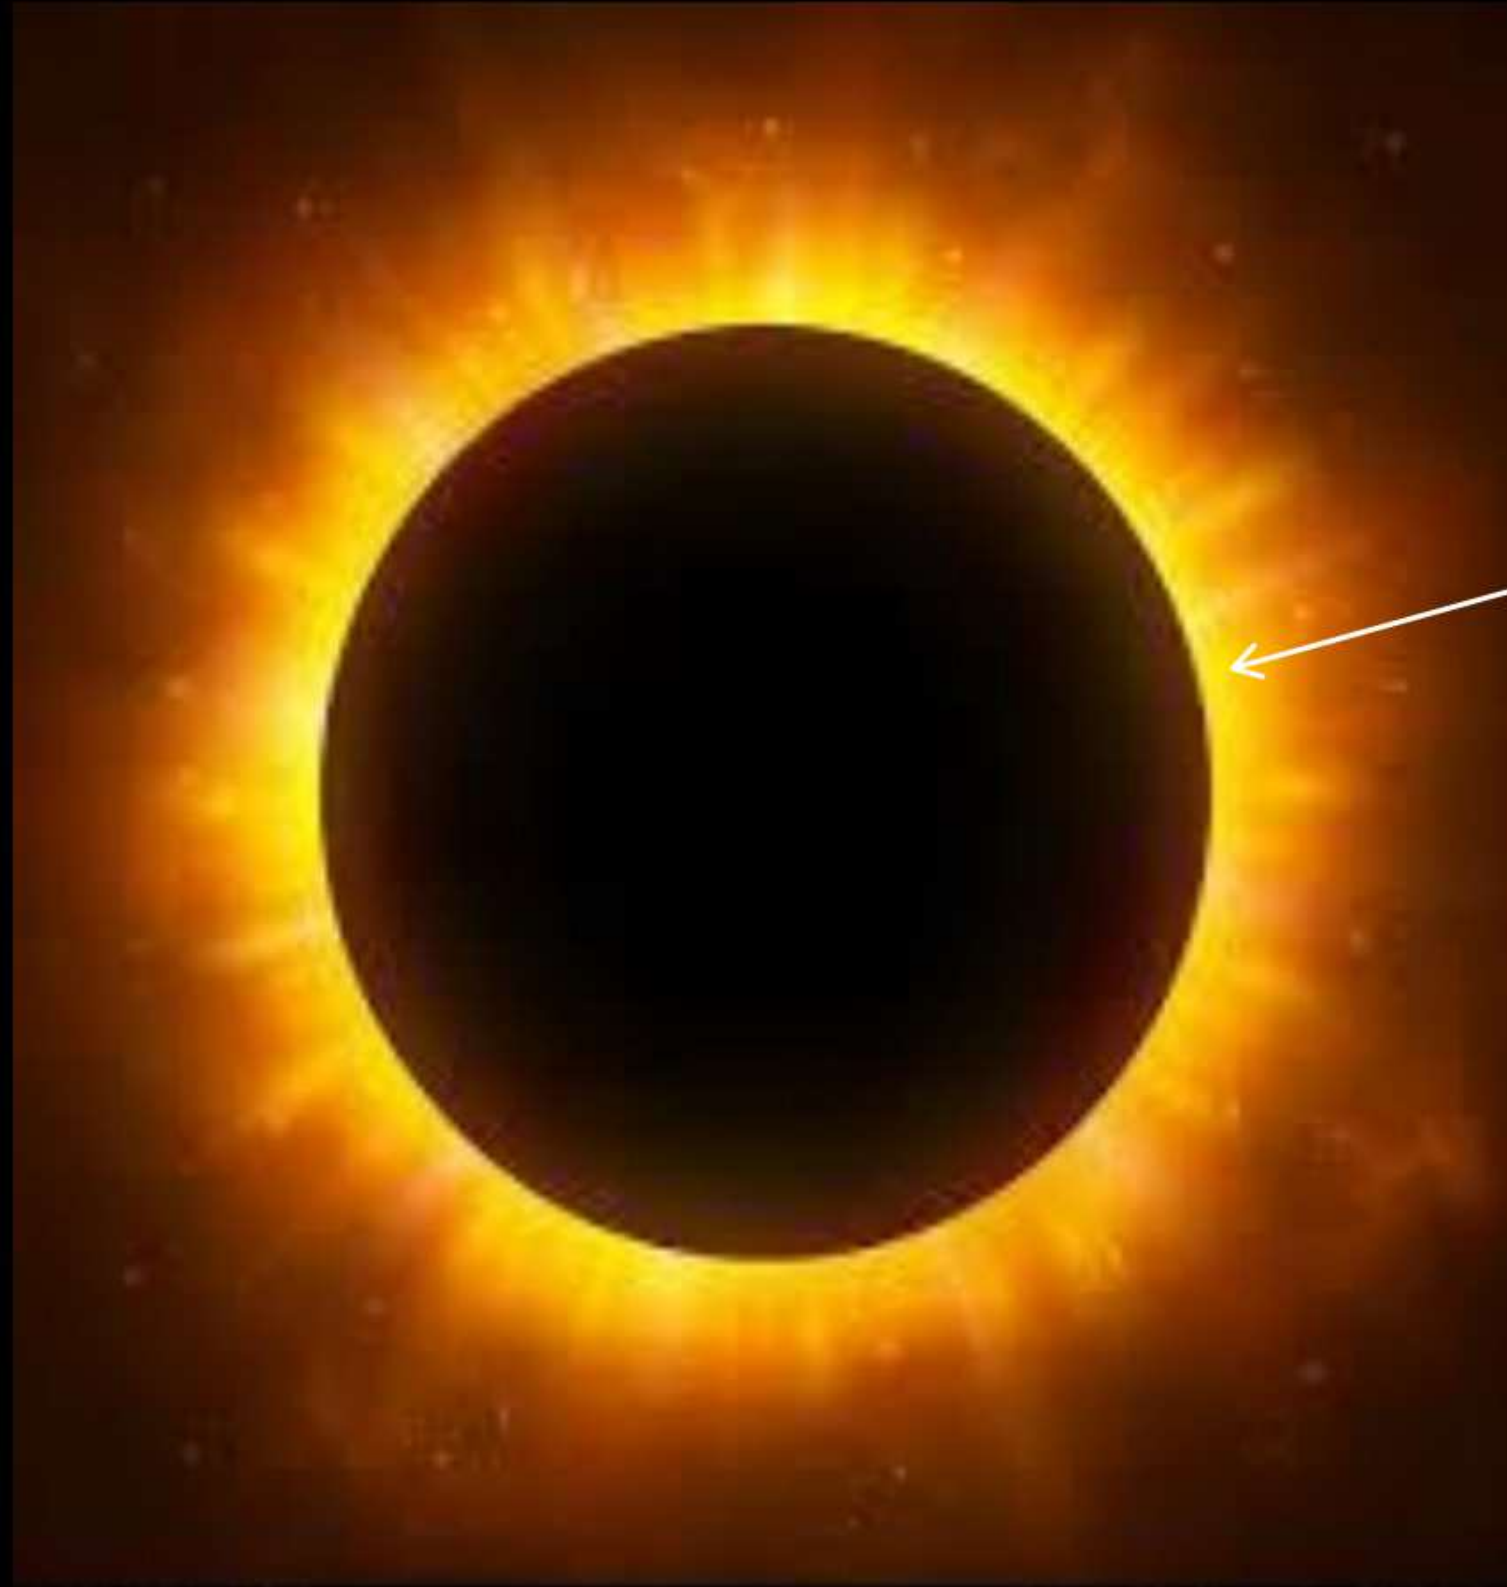


Corona



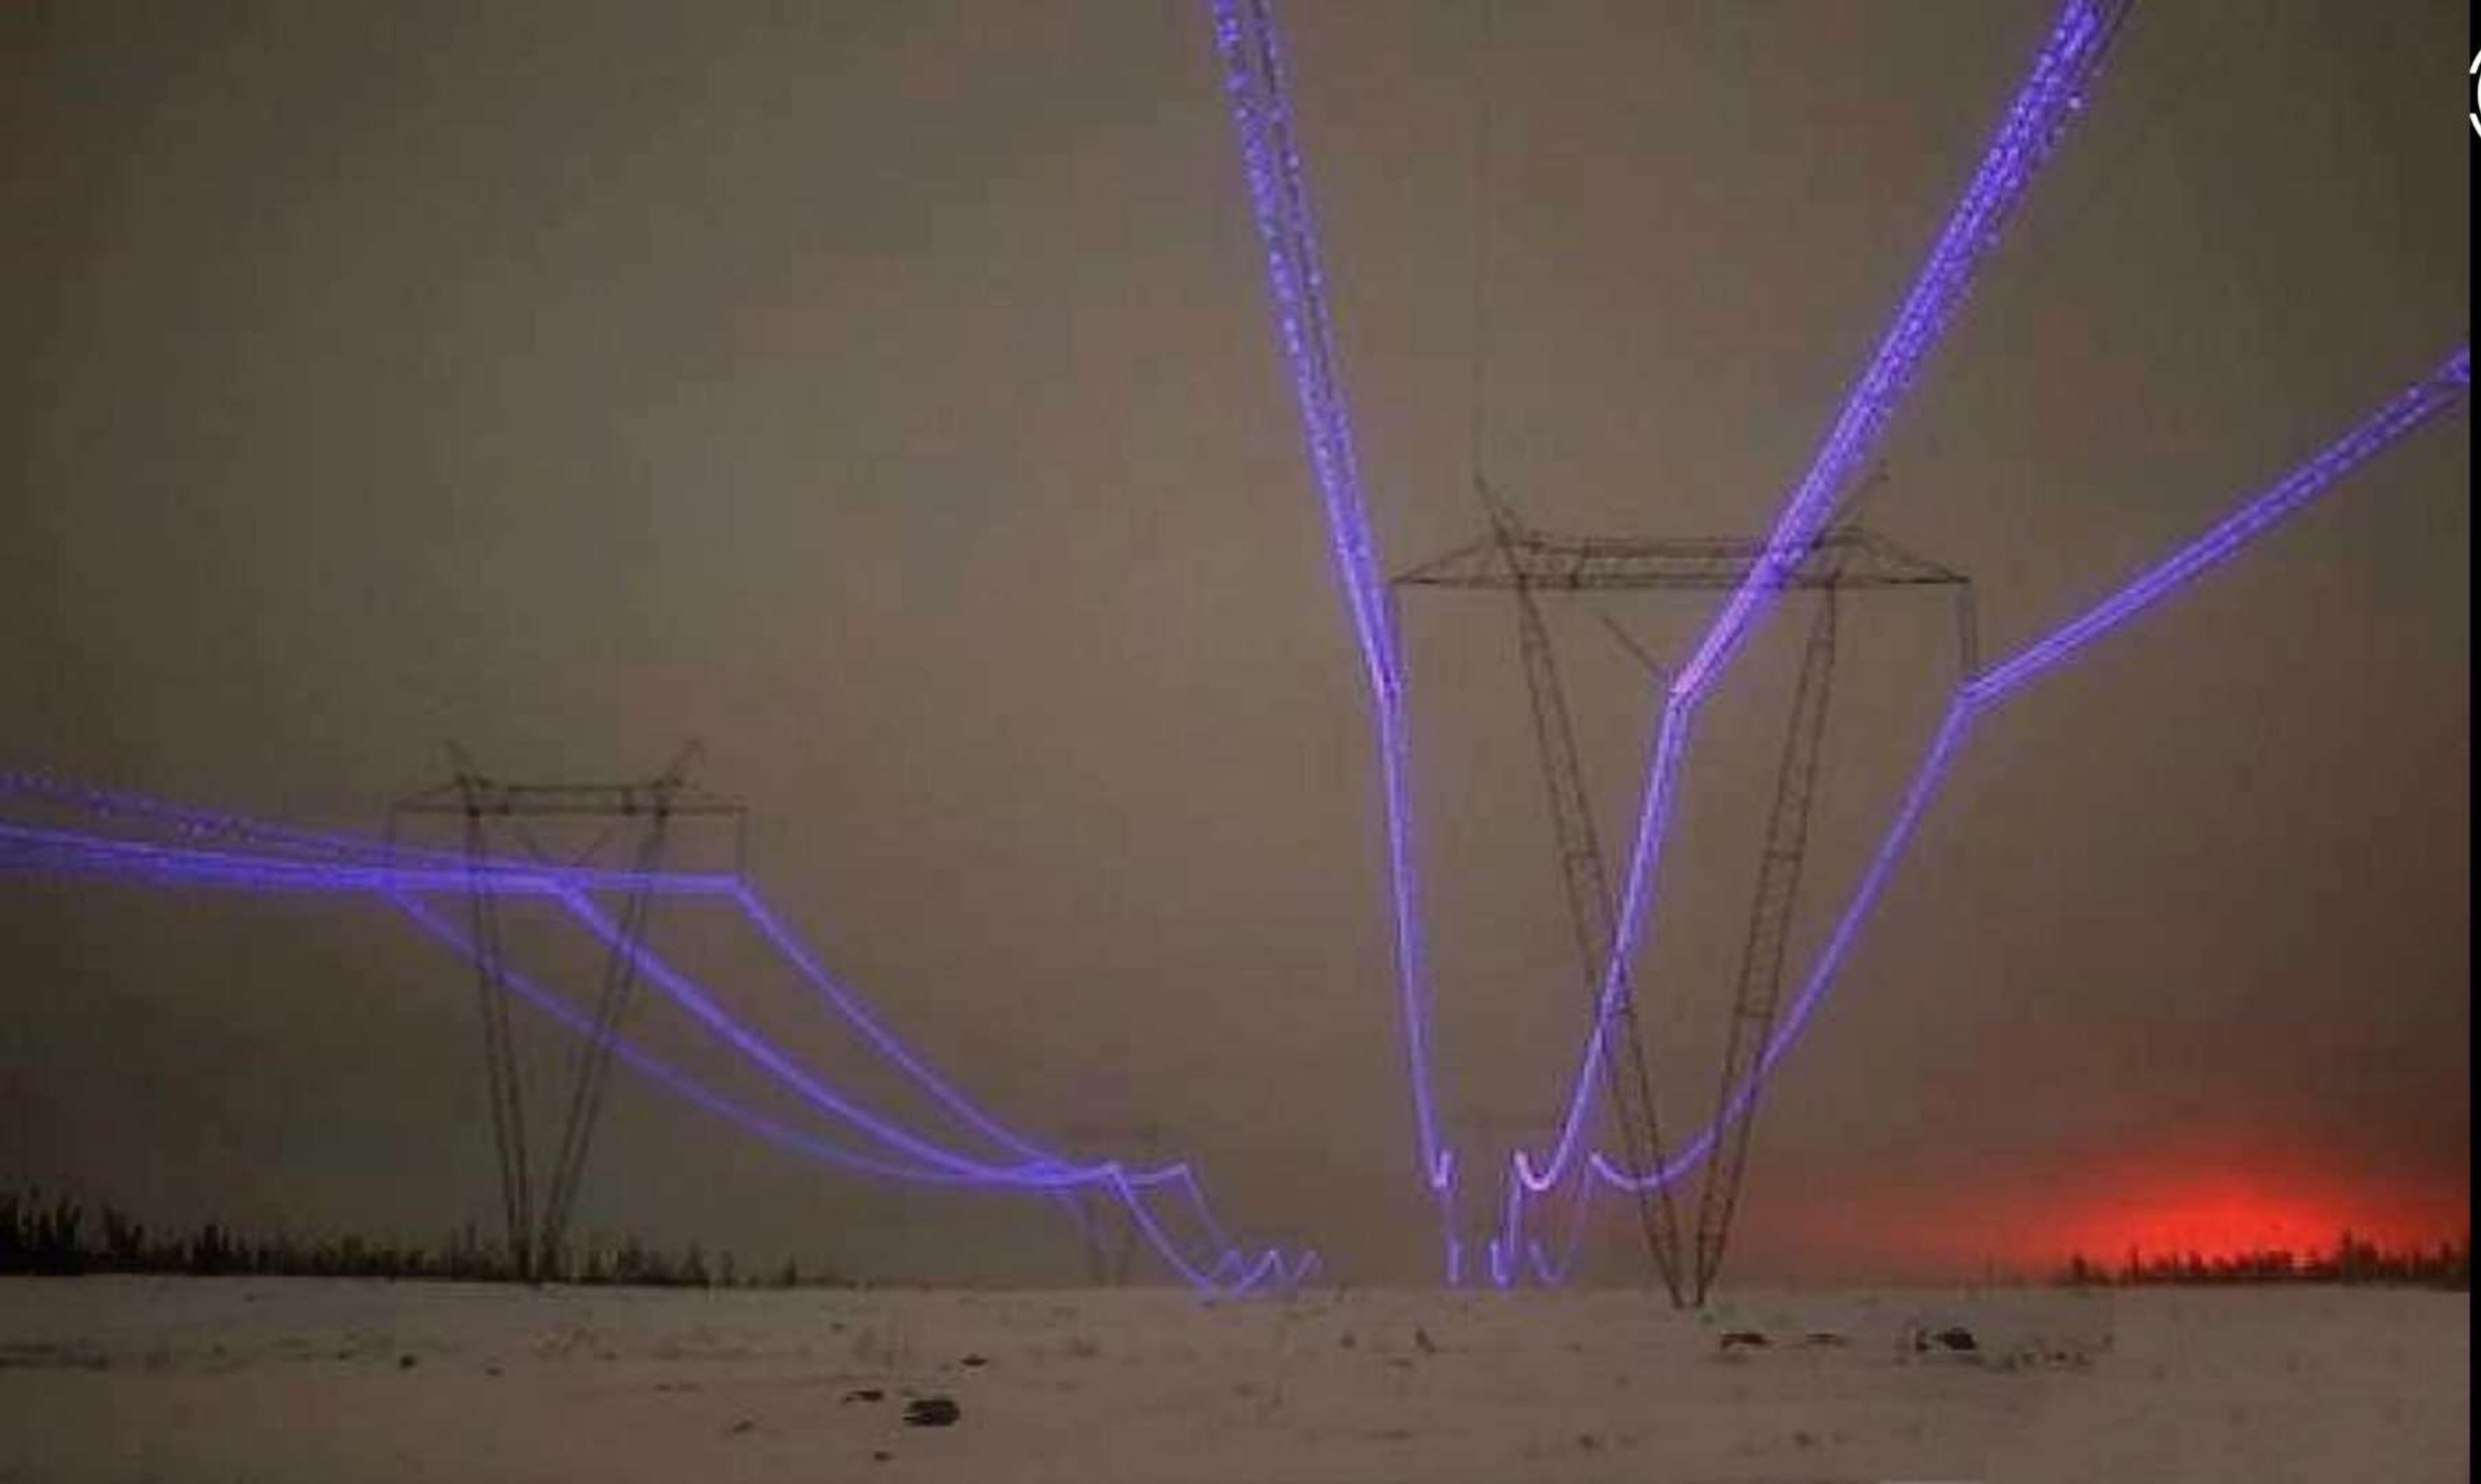

➤ The voltage at which breakdown of insulating material occurs is the Break down voltage. 

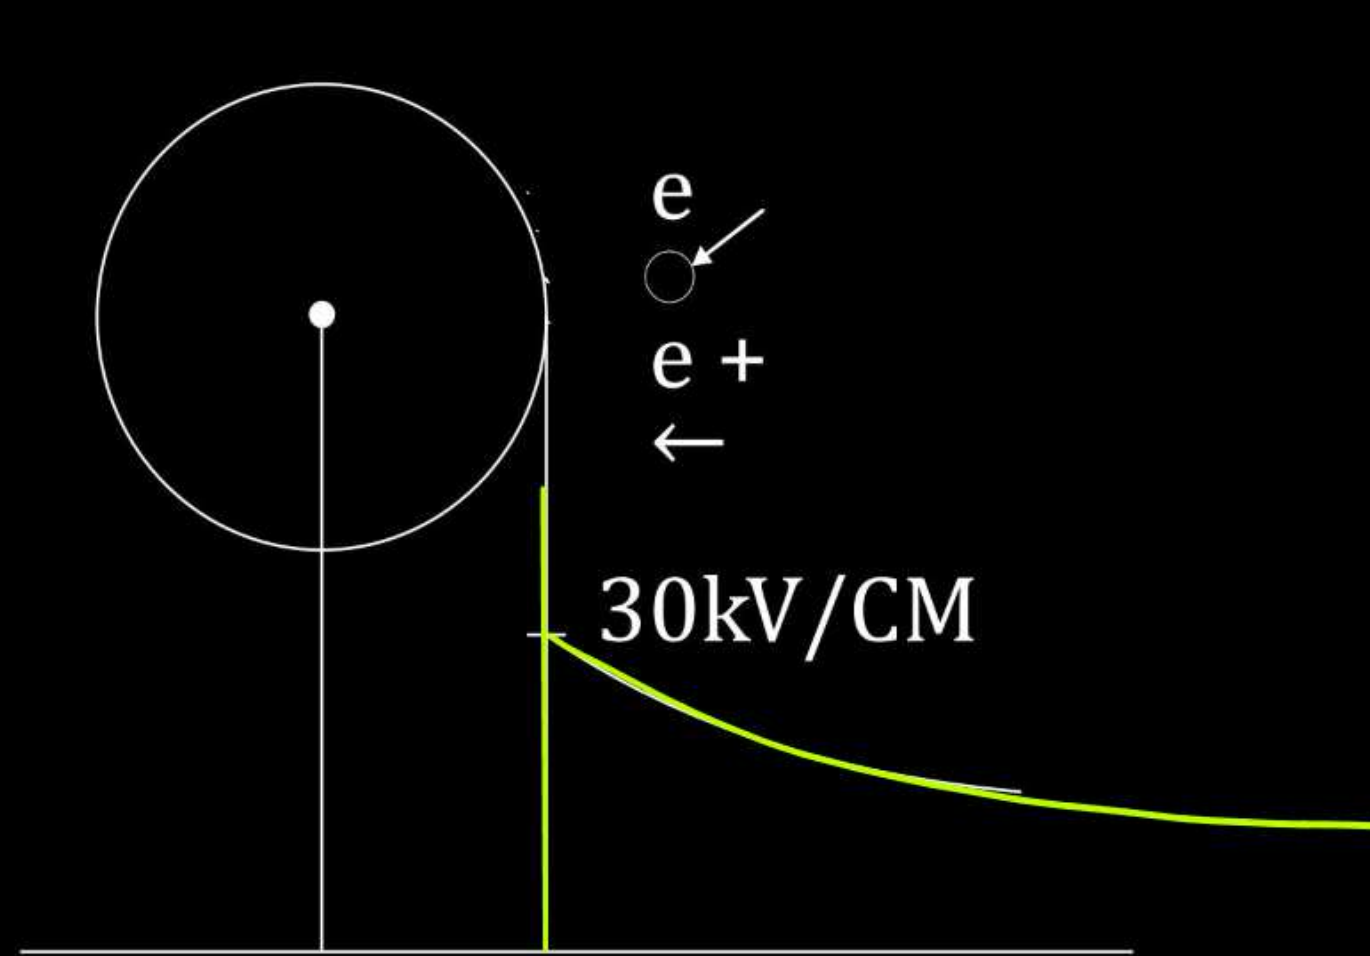

$$E = \frac{q}{2\pi\epsilon r}$$

Corona effect on transmission line





1. Corona is an Ionization of air surrounding power conductor.


2. Due to ultraviolet rays from sun & cosmic rays, radioactivity of soil some ions and charges are still present in air.
3. When electrical field at the surface of conductor is become more than 30 kV/cm (Peak)

4. A force exerts an electron & electron start moving with high velocity.


5. These electrons now collide with air molecules so dislodge electrons and positive ions from air molecules.
6. Now these newly born electrons also start moving due to electrical field & further dislodge air molecule.
7. This will ultimately result in electronic Ions avlanches
8. This Ionization is accompanied by a luminous (violet) in A.C around the conductor & hissing sound is heard & smell of ozone gas is detected.

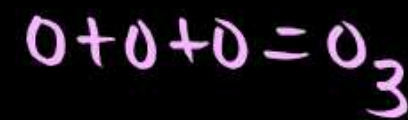

9. In D.C transmission the positive wire has uniform bluish white glow, but negative wire has reddish tufts & beads (non-uniform)

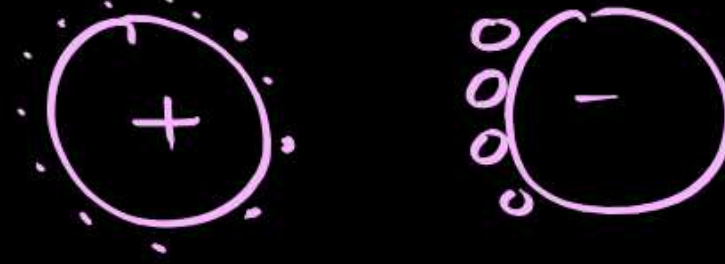

10. Corona is a low temperature and low-density electrical discharge. The corona discharge is slightly warmer than ambient air. The bluish-purple light is emitted by excited nitrogen molecule. As they return to lower energy state, they liberate light in blue and near ultraviolet spectrum with most peak falling between 300 and 400 nm.

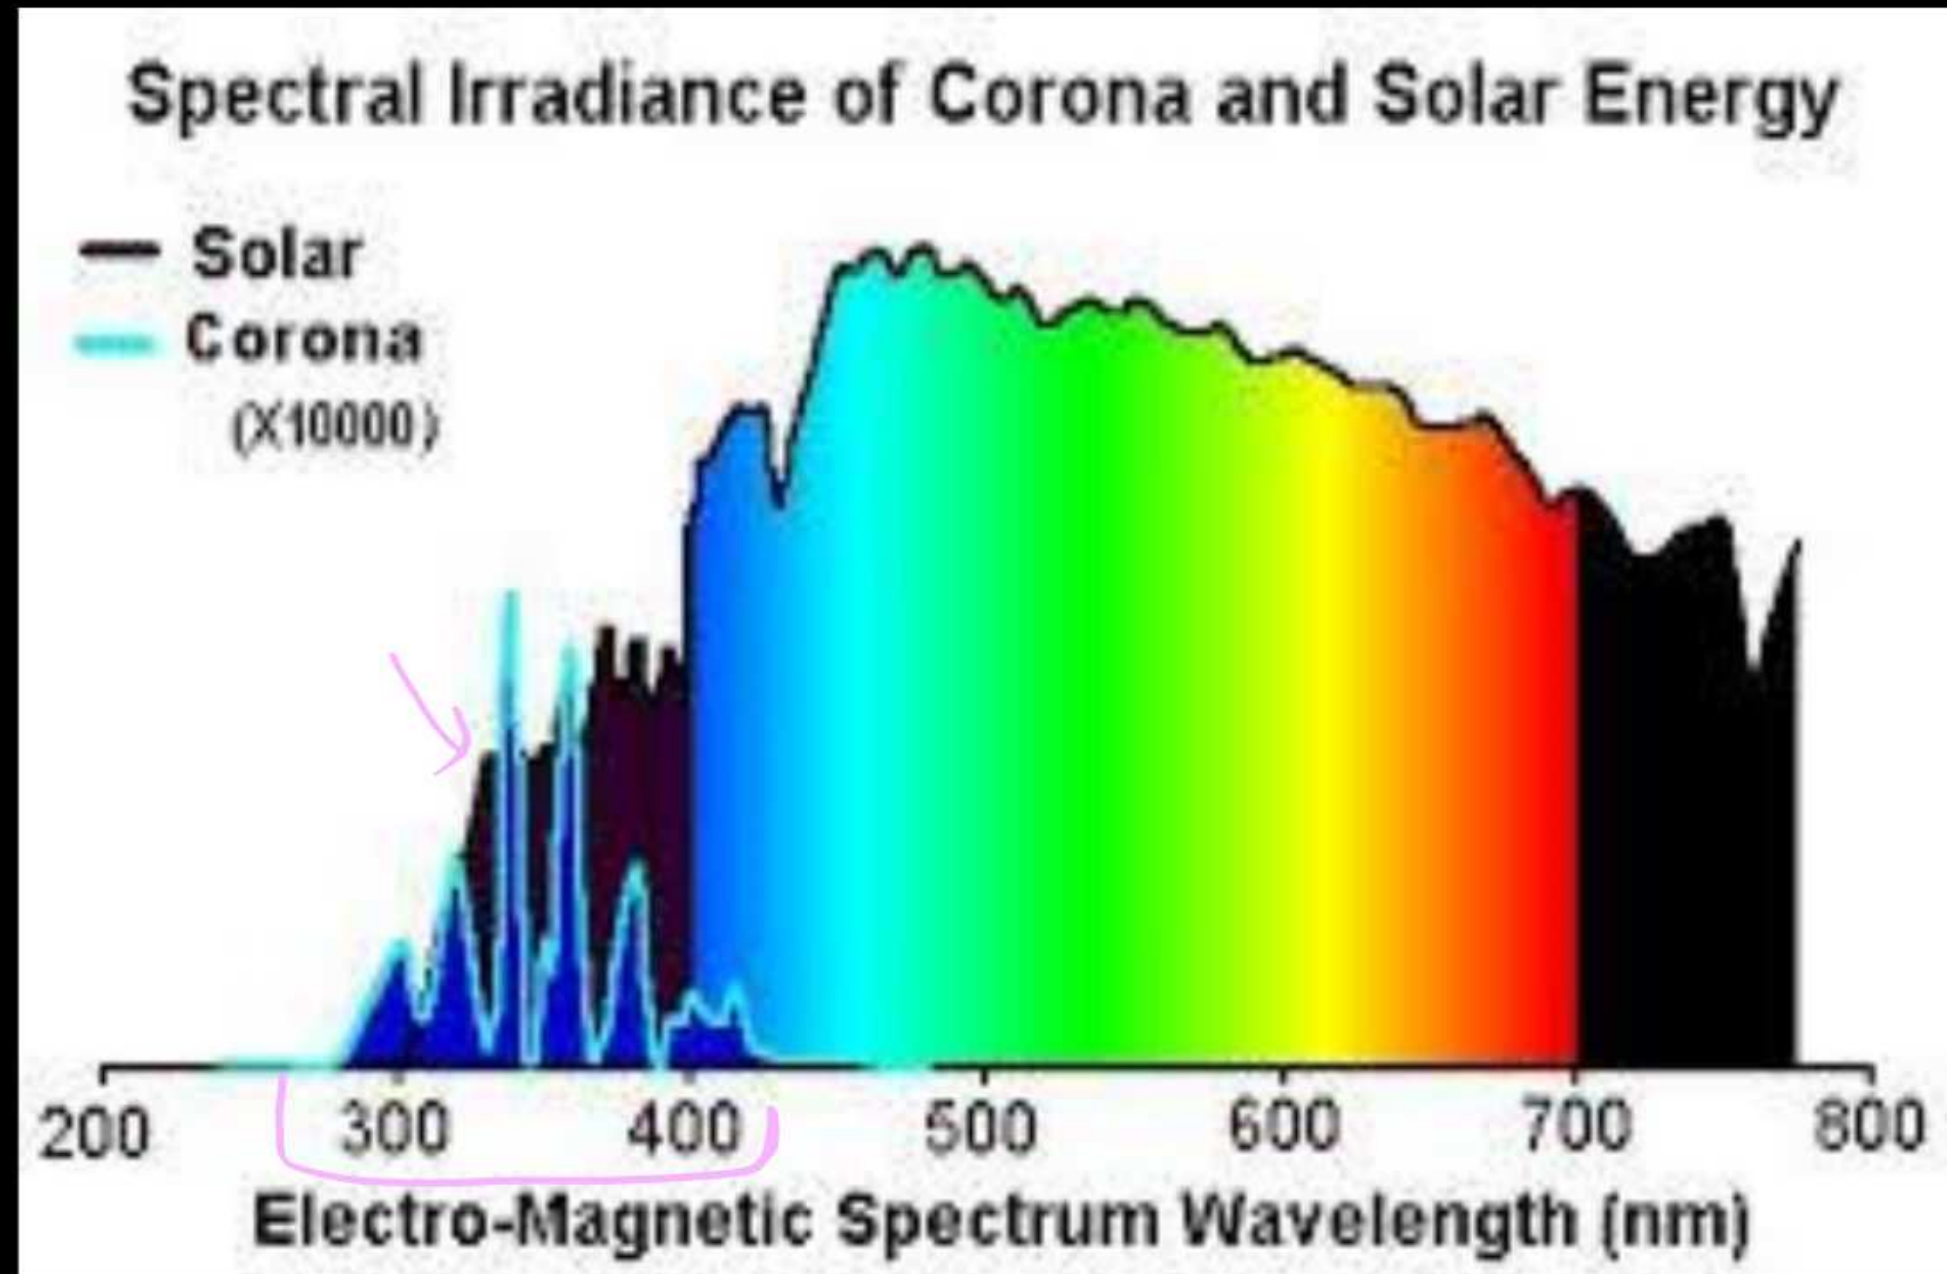

Corona is associated with:

- Light (Violet) around conductor ✓
- Hissing sound ✓
- Odour due ozone gas ✓

Critical Disruptive Voltage

- The potential at which electrical field at the surface of conductor is become more than 30 kV/cm (^{21.2 (RMS)} peak) at (NTP) normal temperature and pressure and generate corona is called critical disruptive voltage.
- Corona begin when electrical field intensity (Potential gradient) at the surface of conductor is become more than dielectric strength of air.

$$g_0 = 30 \text{ kV/cm (Peak Value)}$$

$$g_{0 \text{ (RMS)}} = \frac{30}{\sqrt{2}} \text{ kV} = 21.2 \text{ kV/cm (RMS)}$$

at normal temperature & pressure (at 25°C & 76 mm Hg pressure)

- Dielectric strength depends on air density
- The air density proportional to pressure and inversely proportional to temperature.
- At any other temperature & pressure $g = g_0 \delta$

$\delta = \text{air density factor}$

$$\delta = \frac{P}{(273 + \theta)} \cdot \frac{(273 + 25)}{76}$$

$$g = g_0 \times \frac{P \times (273 + 25)}{76(273 + \theta)}$$

$$g = g_0 \times \frac{3.92P}{273 + \theta}$$

Dielectric strength $\propto$ air density $\propto \frac{\text{Pressure}}{\text{Temperature}}$

$$\text{Dielectric strength} = k \frac{\text{Pressure}}{\text{Temperature}}$$

$$k = \frac{\text{Dielectric strength} \times \text{Temperature}}{\text{Pressure}} = \text{Constant}$$

At 25° & 76 mm Hg Pressure Dielectric strength = $g_0 = 30 \text{ kV/cm}$

At T temperature and P pressure = g

$$\frac{g_0 \times (273 + 25)}{76} = \frac{g (273 + T)}{P}$$

$$g = g_0 \frac{(273 + 25)}{(273 + T)} \times \frac{P}{76}$$

$$g = g_0 \frac{3.92 P}{273 + T}$$


$$g = g_0 \times \delta$$

δ = Air density factor

Critical disruptive voltage for 1 phase line:

The electric field intensity at the surface of conductor.

$$E = \frac{q}{2\pi\epsilon_0 r} \quad \dots (1) \quad (q = \text{charge per unit length})$$

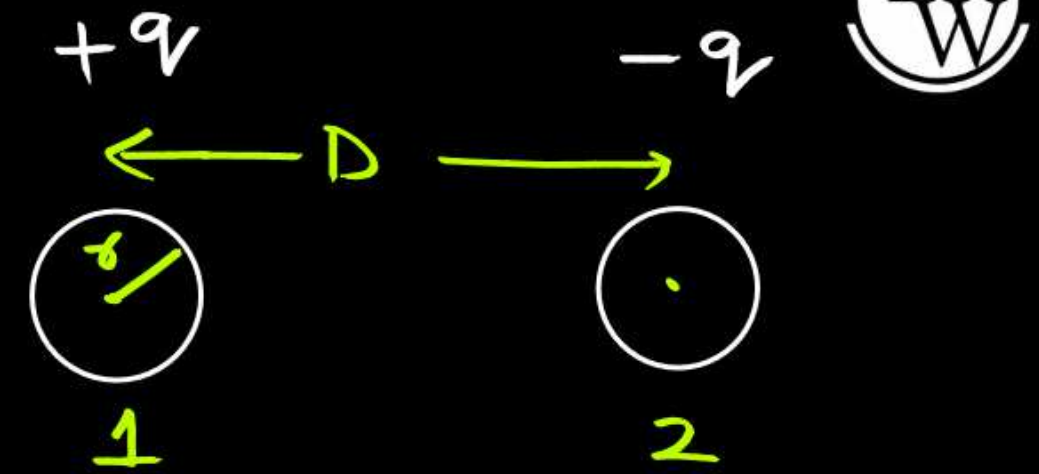

potential difference between two conductors separate by a distance D.

$$V_{12} = \frac{q}{2\pi\epsilon_0} \ln \frac{D}{r} + \frac{(-q)}{2\pi\epsilon_0} \ln \frac{r}{D}$$

$$V_{12} = \frac{q}{2\pi\epsilon_0} \left[\ln \frac{D}{r} - \ln \frac{r}{D} \right] = \frac{q}{2\pi\epsilon_0} \ln \left(\frac{D}{r} \right)^2 = \frac{q}{2\pi\epsilon_0} \cdot 2 \ln \frac{D}{r}$$

$$V_{12} = \frac{q}{\pi\epsilon_0} \ln \frac{D}{r}$$

From equation (1),

$$\frac{q_v}{\pi \epsilon_0} = 2\gamma E$$

Put this value in equation (2)

$$V = 2\gamma E \ln \frac{D}{r}$$

When E is become equal to dielectric strength of air $E = g$, then breakdown occur

So, critical disruptive voltage



$$V_d = 2\gamma g \ln \frac{D}{r}$$


$$V_d = 2\gamma (g_0 \delta) \ln \frac{D}{r}$$

- If conductor is having rough surface or we use stranded conductor then electrical field is disturbed (not uniform). So, at the edges and corners the potential gradient is become more than other region so localized corona occurs. So, we can say, in these conductors, critical disruptive voltage is less than that of normal smooth conductor. So, to take care about roughness & smoothness of conductor. We take a factor m_0 (smoothness factor) $m_0 < 1$

$$V_d = 2r g_0 \delta m_0 \ln \left(\frac{D}{r} \right)$$

for 1-phase, 2 wire line

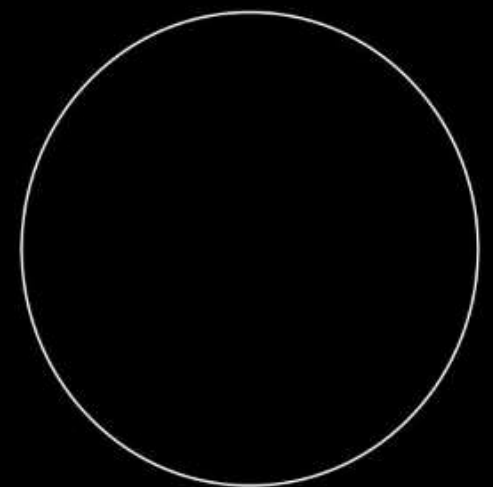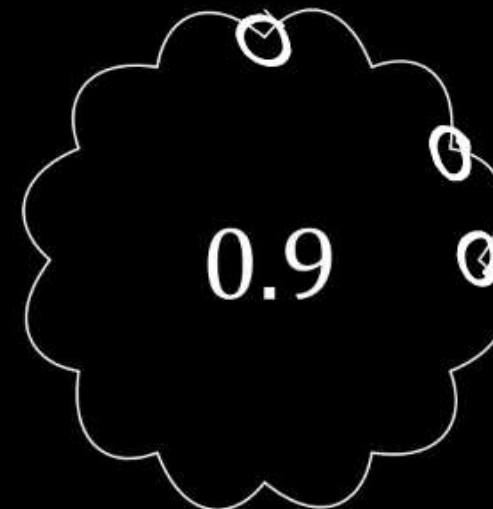

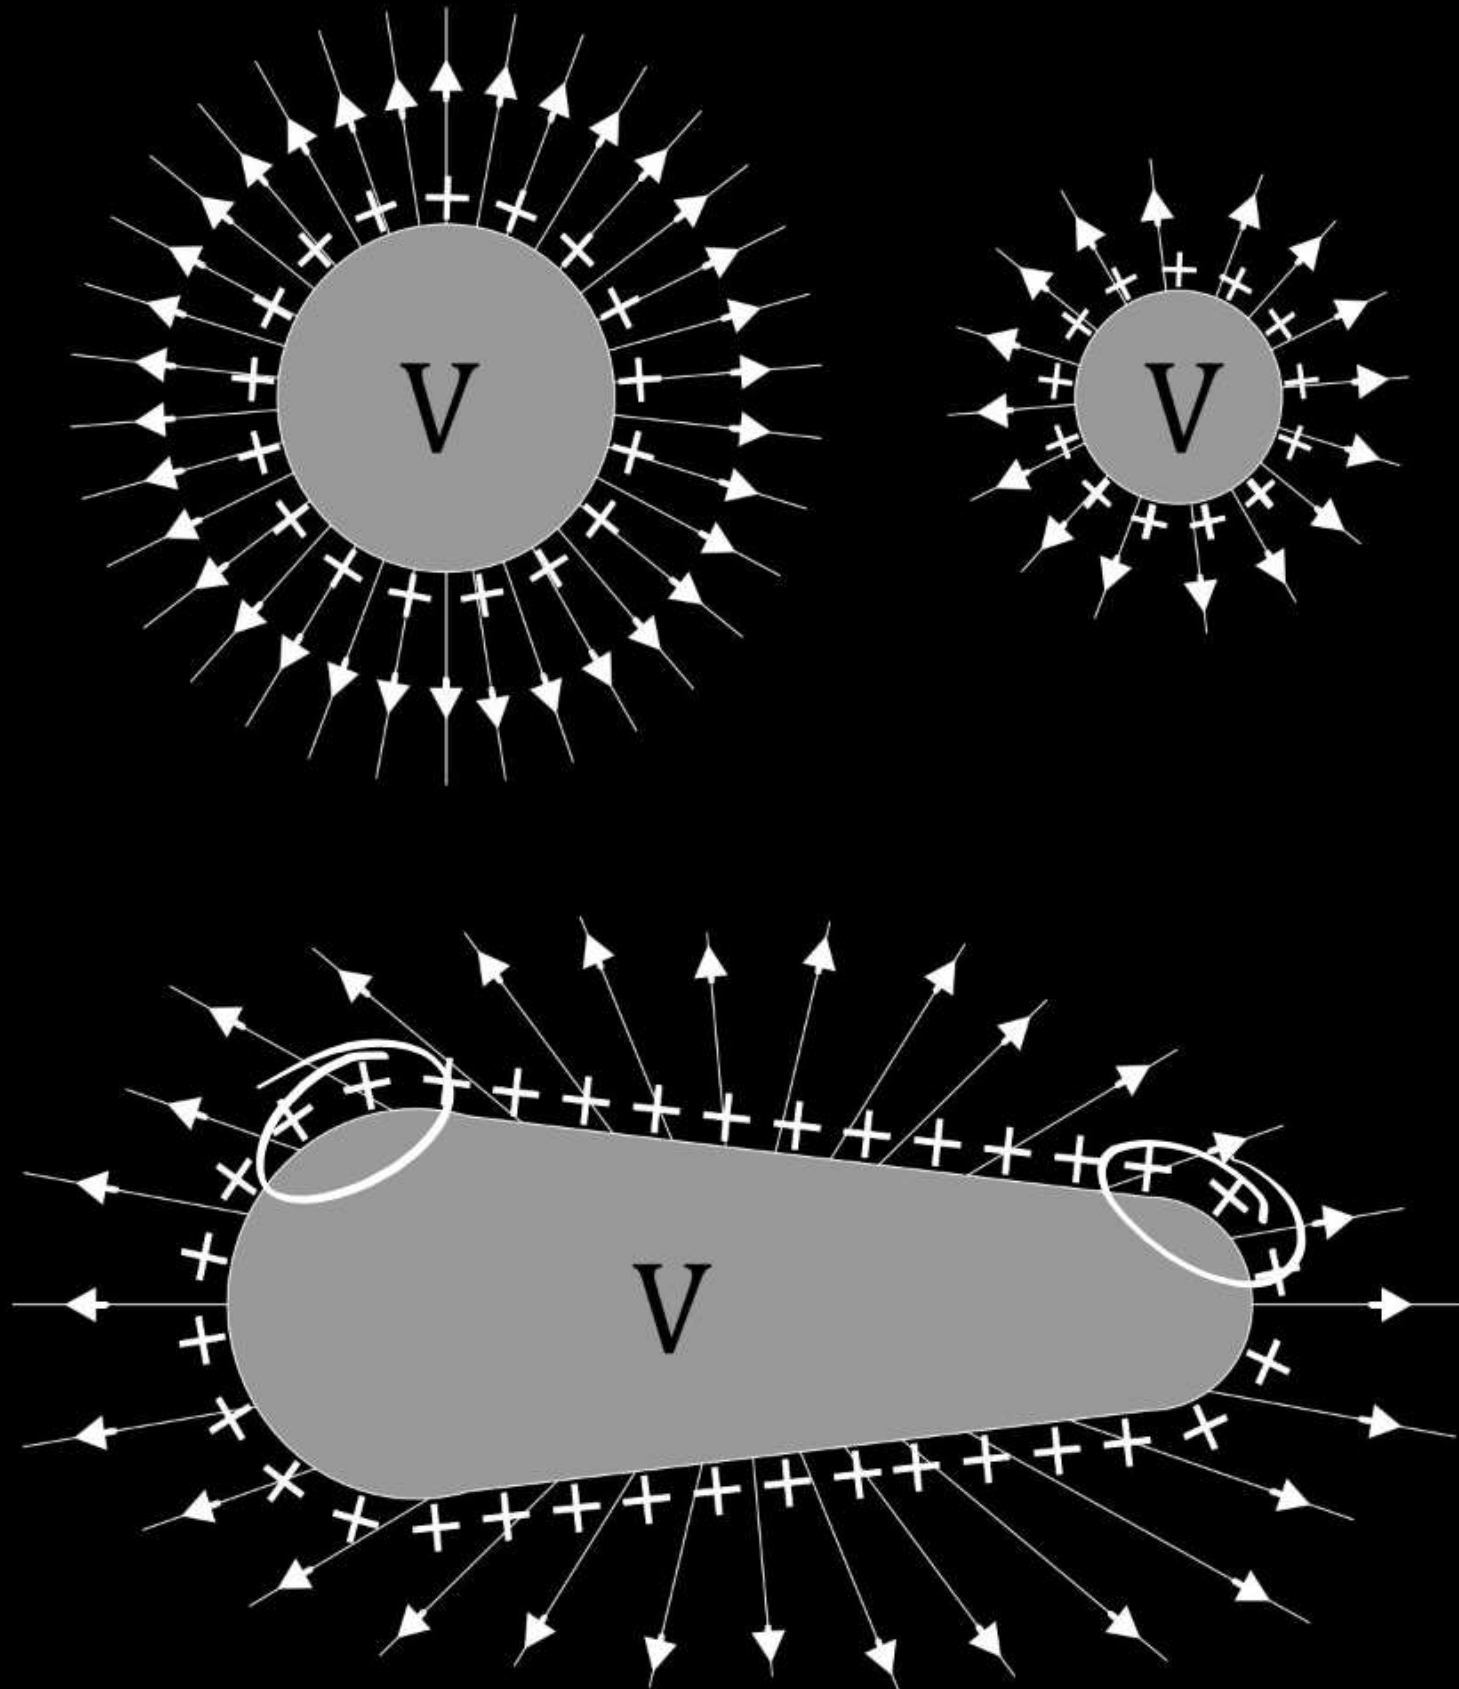



g_0 = dielectric strength of air at normal temperature and pressure

$$= 3 \times 10^6 \text{ V/m (or)} = \frac{3 \times 10^6}{\sqrt{2}} \quad (\text{RMS}) \quad \frac{30 \text{ kV}}{\sqrt{2} \text{ cm}}$$

m_0 = smoothness factor.

$m_0 = 1$ for smooth conductor

$m_0 = \underline{0.92 - 0.98}$ (Rough conductor)

$m_0 = 0.82 - 0.88$ (Stranded conductor)

Critical disruptive voltage for 3 phase line:



$$V = \frac{q}{2\pi\epsilon_0} \ln \frac{D}{r} \quad \text{per phase}$$

$$E = \frac{q}{2\pi\epsilon_0 r}$$

Now put the value of $\frac{q}{\pi\epsilon_0} = \underline{2rE}$

$$V = \frac{2rE}{2} \ln \frac{D}{r} \Rightarrow V = rE \ln \frac{D}{r}$$

When $E = g$ the break down will occur

$$V_d = r(g) \ln \frac{D}{r}$$

So critical disruptive voltage, $V_d = \gamma (g_0 \delta) \ln \frac{D}{r}$

For rough & stranded conductor

$$V_d = r g_0 \delta \underline{m_0} \ln \left(\frac{D}{r} \right) \rightarrow \text{For } 3\phi \text{ line (critical voltage per phase)}$$

$$g_0 = \frac{3 \times 10^6}{\sqrt{2}} \text{ rms}$$

Visual Critical Voltage:

- Experiment show that visual corona occurs when electrical field intensity is become E_v , which is slightly higher than 30kV/cm

So, we add a factor $\left(1 + \frac{0.3}{\sqrt{\delta r}}\right)$ in critical disruptive voltage formula.

$$E = g_0 \delta r \left(1 + \frac{0.3}{\sqrt{\delta r}}\right) \text{ kV / m}$$

$\gamma = C_m$

$$\left(1 + \frac{0.3}{\sqrt{\delta r}}\right) \leftarrow \gamma = m \text{ c.f.}$$

So visual critical voltage

$$V_v = \gamma g_0 \delta \left(1 + \frac{0.3}{\sqrt{\delta r}}\right) \ln \frac{D}{r}$$

$$V_v = 2 \gamma g_0 \delta m_v \left(1 + \frac{0.3}{\sqrt{\delta r}} \right) \ln \frac{D}{r} \quad \text{for } 1\phi \text{ line}$$

$$V_v = \gamma g_0 \delta m_v \left(1 + \frac{0.3}{\sqrt{\delta r}} \right) \ln \frac{D}{r} \quad \text{For } 3\phi \text{ line (Per phase)}$$

m_v = smoothness factor for visual corona

$m_v = 1$ for smooth conductor

= 0.72, for stranded conductor

= 0.82 for decided corona for standard conductor

$$\delta = \frac{3.92P}{273 + \theta}$$

Q.




Find out critical disruptive voltage on a 3-phase overhead T.L. consisting of 3 standard Cu conductor spaced 2.5 m apart at the equilateral triangle. Air temperature and pressure is 21°C & 736 Hg. The conductor diameter = 10.4 mm. Irregularity factor = 0.85

- A 56.5 kV
- B 97.8 kV
- C 114.4 kV
- D 120 kV

$$r = \frac{10.4}{2} = 5.2 \text{ mm} = 0.52 \text{ cm}$$

$$m_0 = 0.85$$

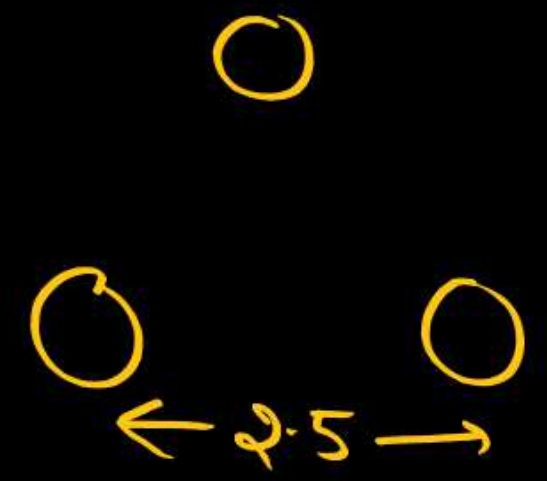

$$\delta = \frac{3.92 P}{273 + T} = \frac{3.92 \times 73.6}{273 + 21} = 0.9813$$

$$D = 2.5 \text{ m} = 250$$

$$V_d = \gamma (g_{08}) m_0 \ln \frac{D}{\gamma}$$

$$V_d = (0.52 \cancel{\text{cm}}) \left(\frac{30}{\sqrt{2}} \frac{\text{kV}}{\cancel{\text{cm}}} \right) \times 0.9813 \times 0.85 \ln \frac{250 \cancel{\text{cm}}}{0.52 \cancel{\text{cm}}}$$

$$V_d = 57.487 \text{ (Per phase)}$$

$$V_d = \sqrt{3} \times 57.487$$

$$V_d = 99.57 \text{ (line)}$$

Q.

Find out visual critical voltage for local corona & decided corona.
Surface factor for local corona = 0.7 & = 0.8 for decided corona



A 114.4

B 120.3

C 124.7

D 152.9

Local corona:-

$$V_v = \gamma (g_0 s) m_v \left(1 + \frac{0.3}{\sqrt{s r}}\right) \ln \frac{D}{r}$$

$$V_v = (0.52 \text{ cm}) \left(\frac{30 \text{ kV}}{\sqrt{2} \text{ cm}} \right) \times 0.9813 \times 0.7 \times \left(1 + \frac{0.3}{\sqrt{0.9813 \times 0.52}}\right)$$

$$V_v = 66.81 \text{ kV per phase}$$

$$\ln \frac{250}{0.52}$$

$$\begin{aligned} V_v(\text{line}) &= 66.81 \times \sqrt{3} \\ &= 115.7 \end{aligned}$$

For decided Corona

$$115.7 \times \frac{0.8}{0.7} = 132.25$$

➤ **Corona Loss:** The positive & negative charges produced by corona move around the conductor. For this movement energy is taken from conductor. So, we can say this energy as a corona loss.

- The energy is dissipated in form of heat, light, sound & chemical action.
- As per 'peek' empirical formula

$$P = 241 \times 10^{-5} \frac{(f + 25)}{\delta} \sqrt{\frac{r}{D}} (V_P - V_D)^2 \quad \text{ kW / km / ph } \quad \text{xx}$$

f = frequency

δ = air density factor

r = radius

D = Distance

V_D = Disruptive critical voltage (Per phase) } kv

V_P = Actual per phase voltage of line

Peek formula is valid only is

(a) if corona loss is predominating

(b) $25 < f < 120$

(c) $\frac{V_P}{V_D} > 1.8$

(d) Radius of conductor > 0.25 cm

if $\frac{V_P}{V_D} < 1.8$, then Peterson formula give more accurate result than Peek formula

$$P_C = \frac{21 \times 10^{-6} f V^2}{(\log_{10}(D/r))^2} \times F$$

Where, F is a factor

V_P/V_D	0.6	0.8	1	1.2	1.4	1.6	1.8	2	2.2
F	0.012	0.018	0.05	0.08	0.3	1.0	3.5	6	8

- In foul weather condition, we take V_p as a 80% of fair weather value.

Note → if $V_D > V_P$

160 kV

$$\frac{220}{\sqrt{3}} = 127$$

So No corona occur $P_c = 0$

Q.



What will be corona loss for a 3-phase line operating at 110 kV. Which has conductor of 2.5 cm diameter arranged in a 3.05 m distance. Assume air density factor of 1.07 & dielectric strength of air is 21 kV/cm.

A 0

B 10

C 11.2

D 12.4

$$V_d = \gamma (g_0 \delta) m \ln \frac{D}{r}$$

$$V_D = 1.25 \cancel{\text{cm}} \times 21 \frac{\text{kV}}{\cancel{\text{cm}}} \times 1.07 \times 1 \ln \frac{305}{1.25}$$

$$V_D = 154.4 \text{ kV (Per phase)}$$

$$V_d(\text{line}) = \underline{267.42 \text{ kV}}$$

$$\underline{V_d > V_p}$$

No Corona

$$\text{Corona loss} = 0$$



2 Minutes Summary

→ Corona

→ Critical disruptive voltage

→ Visual critical voltage

→ Corona loss


Thank you

GW
Soldiers !



Electrical Engineering

Power System

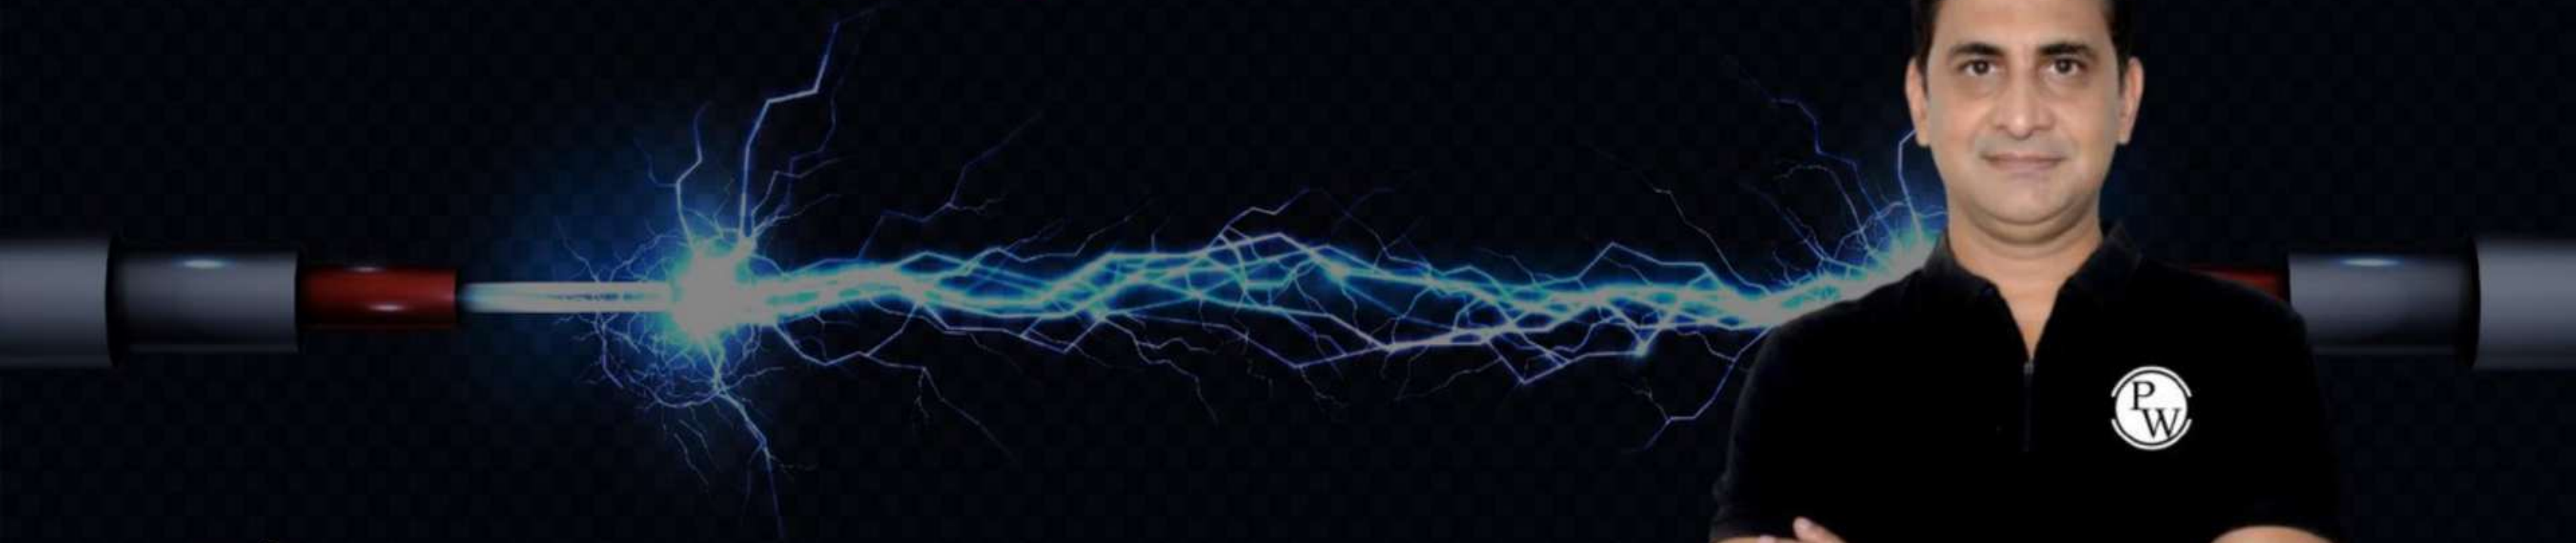

Lecture No.-2

Corona

By- Ajay Gupta Sir



Recap Of previous class

- ✓ 1. corona
- ✓ 2. Critical disruptive voltage
- ✓ 3. Visual critical voltage
- ✓ 4. corona




Topics to be Covered

1. Factor affecting *Corona*

2. Advantage of corona

3. Disadvantage of corona

4. Corona QUESTIONS

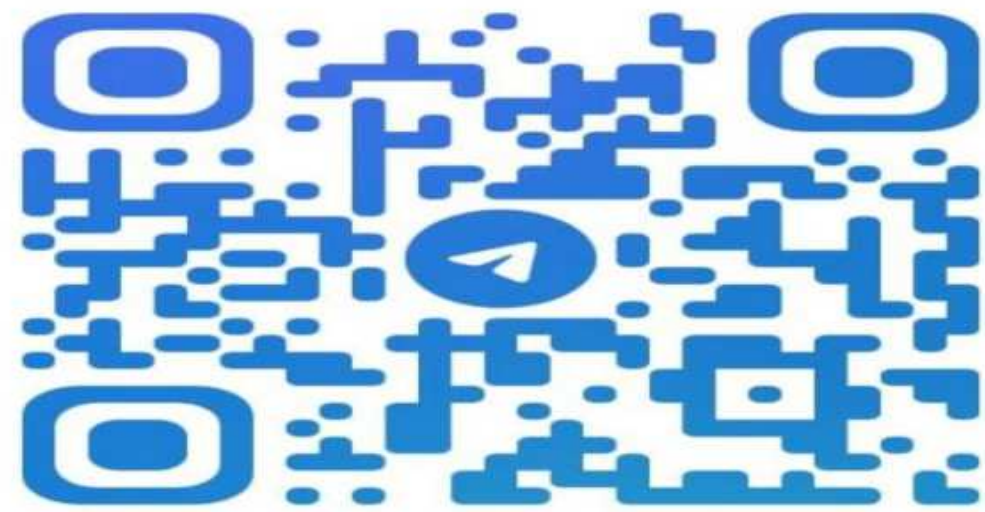

@AJAYGUPTASIRPW

Q.

What will be corona loss for a 3-phase line operating at 110 kV. Which has conductor of 2.5 cm diameter arranged in a 3.05 m distance. Assume air density factor of 1.07 & dielectric strength of air is 21 kV/cm.

- A** 0
- B** 10
- C** 11.2
- D** 12.4

$$V_D > V_P$$

$\Rightarrow$ No Corona


$$\therefore \text{Corona loss} = 0$$

Q.



A 3-phase overhead transmission line consist of 3 conductors in horizontal spacing with 2 meter spacing. The conductor diameter is 1.00 Cm and surface factor is 0.80. The air pressure and temperature is 74 cm hg pressure and 21-degree cent. The critical disruptive voltage is? The dielectric strength of air at 30 kV/cm (Peak) at 76 cm pressure and 25-degree cent. (Give ans in kV)

$$76 \text{ cm} = 760 \text{ mm}$$

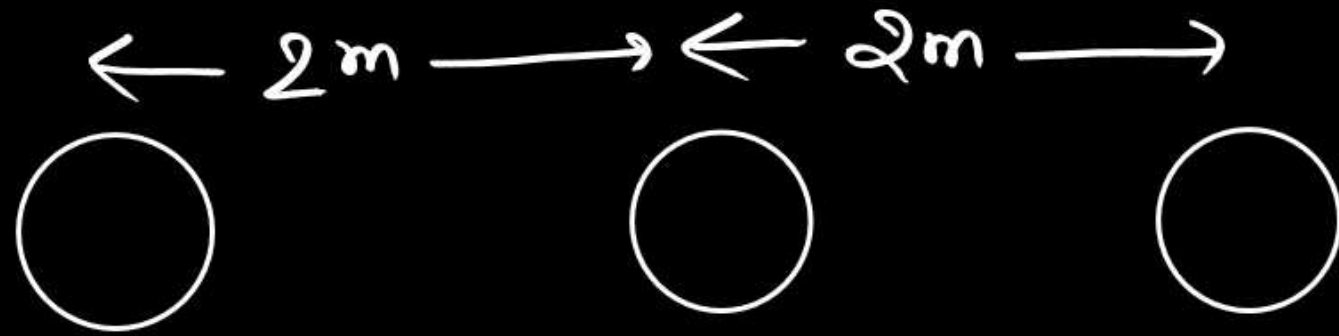

$$r = \frac{1}{2} = 0.5 \text{ cm}$$

$$\begin{aligned} D_{eq} &= \sqrt[3]{D_{12} \cdot D_{23} \cdot D_{31}} \\ &= [2 \times 2 \times 4]^{1/3} \\ &= 2.52 \text{ meter} \end{aligned}$$

$$\delta = \frac{3.92P}{273+T} = \frac{3.92 \times 74}{273+21} = 0.9866$$

$$V_d = \gamma (g_0 \delta) m_0 \ln \frac{D e g}{\gamma}$$

$$V_d = (0.5 \cancel{\text{cm}}) \left(\frac{30 \text{ kV}}{\sqrt{2} \cancel{\text{cm}}} \right) \times 0.9866^{0.8} \ln \frac{252}{0.5}$$

$$V_d = 65.11 \times 0.8 = 52.088$$

$$\begin{aligned} V_d(\text{line}) &= 65.11 \times \sqrt{3} \times 0.8 \\ &= 90.22 \text{ kV} \end{aligned}$$

Q.



A 3-phase overhead transmission line consist of 3 conductors in equilateral spacing with 2.44 meter spacing. The conductor diameter is 1.04 Cm and surface factor is 0.85. The air pressure and temperature is 74 cm hg pressure and 21.1-degree cent. The visual critical disruptive voltage is? The dielectric strength of air at 30 kV/cm (Peak) at 76 cm pressure and 20-degree cent.

- A 137.95 kV/phase
- B ☒ 79.65 kV/Phase
- C 76.30 kV/Phase
- D 68.12 kV/Phase

$$g \propto \frac{P}{273+T}$$

$$\frac{g \times (273+T)}{P} = \text{Constant}$$

$$\gamma = \frac{1.04}{2} = 0.52$$

$$\frac{g_0 (273 + 20)}{76} = \frac{g (273 + 21.1)}{74}$$

$$g = g_0 \times 0.97 = \underline{g_0 8}$$

$$V_v = \gamma (g_0 8) m_v \left(1 + \frac{0.3}{\sqrt{8\gamma}} \right) \ln \frac{D}{\gamma}$$

$$= 0.52 \text{ cm} \times \frac{30 \text{ kV}}{\sqrt{2} \text{ cm}} \times 0.97 \times 0.85 \left(1 + \frac{0.3}{\sqrt{0.97 \times 8.52}} \right) \ln \frac{244}{0.52}$$

$$= 9.05 \times 1.422 \times 6.151$$

$$= 79.15 \text{ kv (Per phase)}$$

Q.



A 3-phase 220 Kv, 50 Hz , 250 Km, overhead transmission line consist of 3 conductors in equilateral spacing with 6 meter spacing. The conductor diameter is 22.26 mm and surface factor is 0.84. The air pressure and temperature is 73 cm hg pressure and 25-degree cent. What is total corona loss using peek formula.

A ~~322~~ KW

B 400 KW

C 505 KW

D 450 KW

$$P = 241 \times 10^{-5} \left(\frac{t+25}{\delta} \right) \sqrt{\frac{\gamma}{D}} (V_P - V_D)^2 \text{ Kw/Km/Phase}$$

$$\delta = \frac{3.92 P}{273 + T} = \frac{3.92 \times 73}{273 + 25} = 0.96$$

$$\gamma = \frac{22.26}{2} = 11.13 \\ = 1.113 \text{ cm}$$

$$V_d = \gamma(g_{08}) m_0 \ln \frac{D}{\gamma}$$

$$V_d = 1.113 \times \frac{30 \text{ kV}}{\sqrt{2} \text{ cm}} \times 0.96 \times 0.84 \ln \frac{600}{1.113}$$

$$V_d = 119.75 \text{ (Per phase)}$$

$$V_P = \frac{220}{\sqrt{3}} = 127.01$$

$$V_P > V_D \Rightarrow \text{corona will occur}$$

$$P_c = 241 \times 10^{-5} \left(\frac{50+25}{0.96} \right) \sqrt{\frac{1.113}{600}} (127.01 - 119.75)^2 \text{ kW/km/ph}$$

$$P_c = 241 \times 10^{-5} \times 78.125 \times 0.043 \times 52.70$$

$$P_c = 0.4266 \text{ kW/km/phase}$$

$$P_c = 0.4266 \times 250 \times 3$$

$$P_c = 319.9 \text{ kW}$$

Q.



What will be total corona loss for a 3 phase 220 kV, 200 km long line having D/r ratio 650. Take factor F as 0.05. Use Peterson formula?

- A 64.2 kW ✓
- B 21.4 kW
- C 56.8 kW $\frac{220}{\sqrt{3}} = 127$
- D 112.4 kW

$$P_c = \frac{21 \times 10^{-6} V_p^2}{\left[\log_{10} \left(\frac{D}{r} \right) \right]^2} \times F \quad \text{KW/km/ph.}$$

$$P_c = \frac{21 \times 10^{-6} \times (127)^2 \times 50}{\left[\log_{10} (650) \right]^2} \times 0.05$$

$$P_c = \frac{0.107 \text{ KW/km/ph}}{\quad} \quad 0.107 \times 3 \times 200 = 64.2 \text{ kW}$$

FACTOR AFFECTING CORONA

1. Frequency:

$$P_C \propto (f \uparrow + 25)$$

So, corona loss increases with frequency. In D.C corona loss will be less.

2. System voltage:

$$P_C \propto (V_P \uparrow - V_D)^2$$

$(201-20)^2 = 1$	$(300-20)^2$
$(210-20) = 190$	$= 1880$

When voltage is large as compared to V_D . The P_C will increase with faster rate.

3. Atmosphere Factor:

$$P_c \uparrow \propto \frac{1}{\delta \downarrow}$$

$$\delta \propto \frac{\text{Pressure} \downarrow}{\text{Temp.}}$$

At hilly region atmosphere pressure reduce, so δ decrease and corona loss increase.

4. Dust, Rain, Snow:

Due to formation of Dust, Rain drops & Snow the roughness of conductor increase. Which distort the E so at the sharp edges potential gradient is become high so critical disruptive voltage is reduce & corona loss increase

$$V_d \downarrow \propto m_0 \downarrow$$

$$P_C \uparrow \propto (V_P - V_D \downarrow)^2$$



5. Diameter of Conductor:

$$\downarrow P_C \propto \sqrt{\frac{r \uparrow}{D}} (\underbrace{V_P - V_D}_{\uparrow})^2 \downarrow$$

$$V_D \uparrow \propto r \uparrow$$

$$V_D \uparrow = r \uparrow (g_0 \delta)^{m/n} \frac{P}{r \uparrow}$$

So, by increasing radius corona loss is decreased

- When we use bundle conductor it increases effective radius of conductor so corona loss is reduced



Number of conductors per Phase

$$\underline{GMR} \uparrow = \underline{\text{self GMD}} \uparrow \rightarrow \underline{V_D} \uparrow \rightarrow \underline{P_C} \downarrow$$



Heating: During foul weather condition water droplet, fog and snow exist at conductor surface. Due to heating it will be removed from surface so surface is become smoother & corona loss reduced.


Increasing Distance Between Conductor:

If distance between conductors is increased the potential gradient at surface of conductor reduce so corona loss reduces.



Method to reduce corona:

- Large diameter conductor ✓
- Bundled conductors ✓
- Hollow conductors ✓

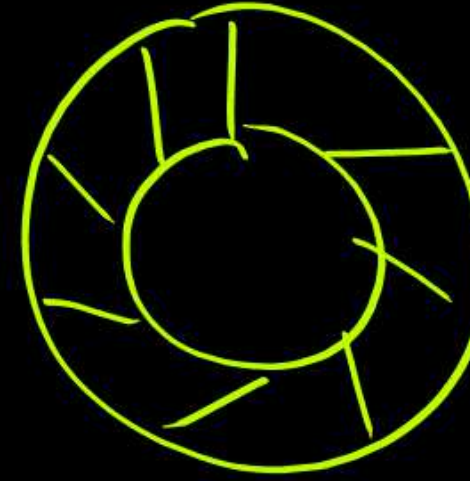

Advantage of corona (IMP)

- Due to corona effective diameter is increase

$C \uparrow$


$$C \uparrow = \frac{0.02412}{\log \frac{D}{r}}$$



$\uparrow T = RC \uparrow$



So, steepness of voltage surge is reduced due to lightning & switching, it act as a safety valve.

- It partially dissipated the surges as a corona loss.

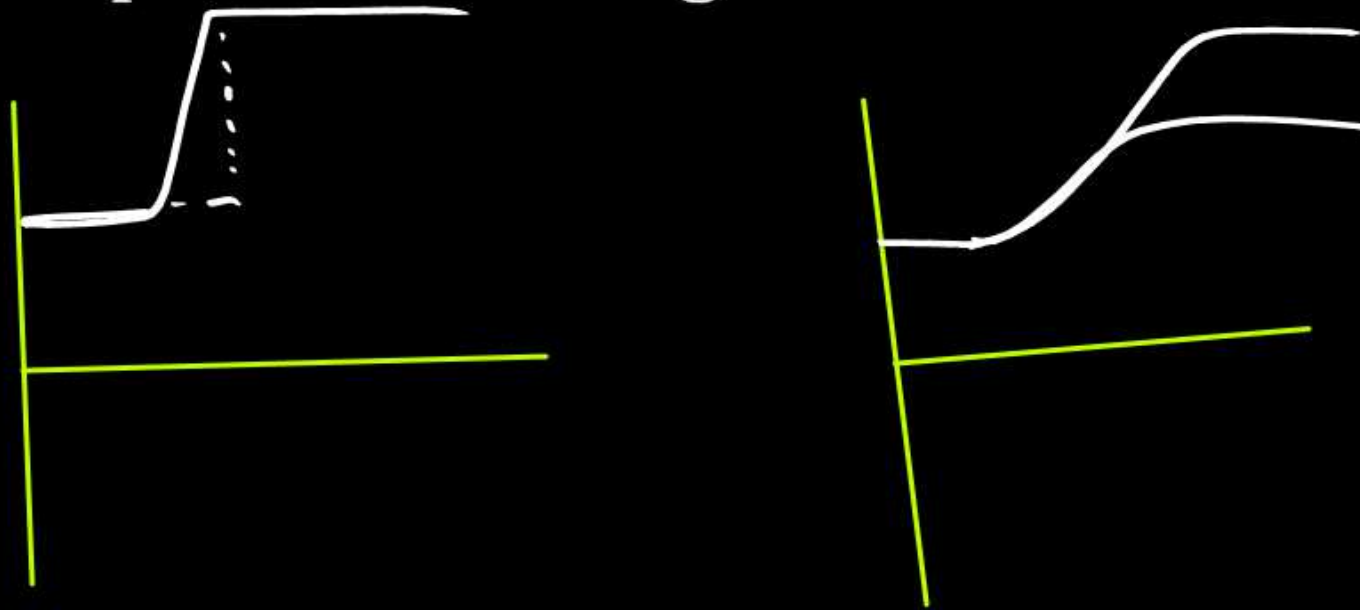

Disadvantage:


1. It creates energy loss so efficiency of system reduces.
2. Due to formation of ozone the corrosion occurs at the conductor.
3. Due to corona effective diameter increase $\rightarrow C$ will increase $\rightarrow$ it increases charging current
4. Due to corona third harmonic current create & it create third harmonic IMP voltage drop. So, it creates interference with communication line

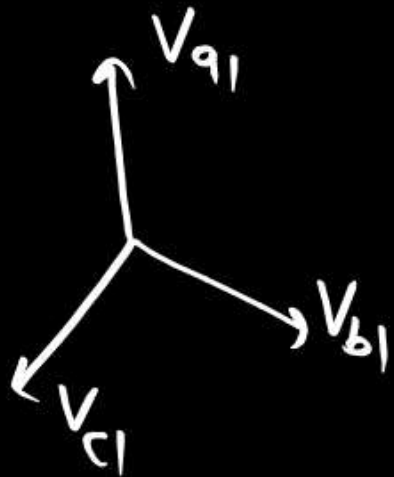


$$\phi_{a1} + \phi_{b1} + \phi_{c1} = 0 \implies$$

$$\phi_{a3} + \phi_{b3} + \phi_{c3} \neq 0$$



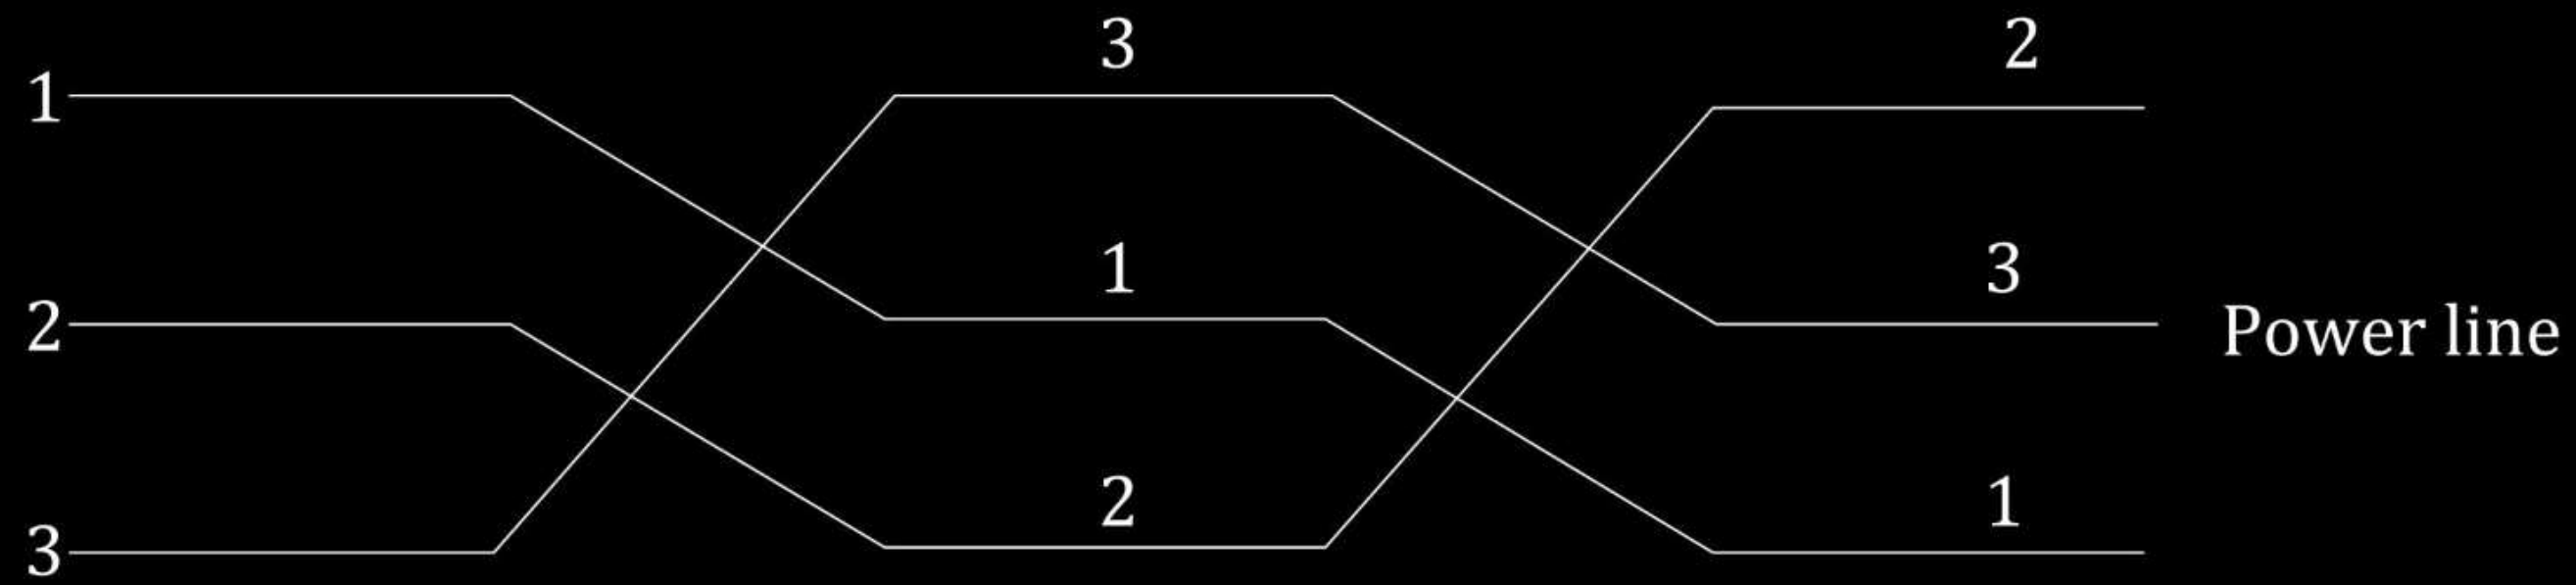

One transposition cycle (Barrel)

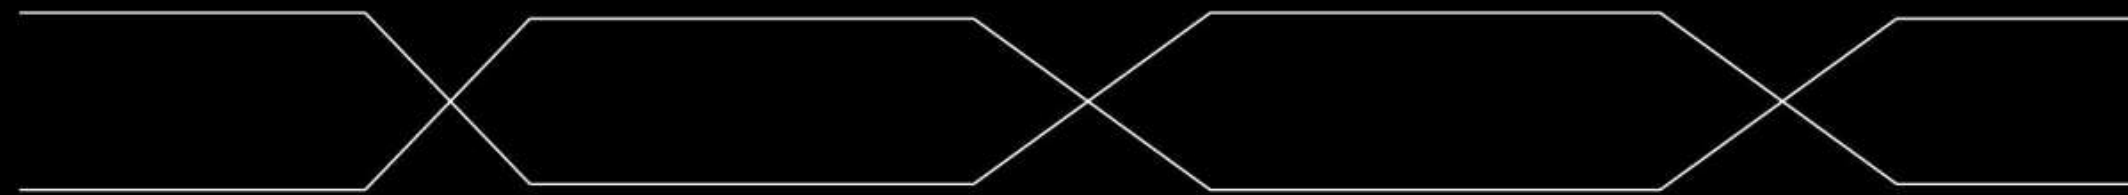

Telephone of communication line

Q.

The good effect of corona on overhead lines is to

[ESE-2001]



- A** increase the line carrying capacity due to conducting ionized air envelop around the conductor
- B** increase the power factor due to corona loss
- C** reduce the radio interference from the conductor
- D** reduce the steepness of surge fronts

Q.

What is the approximate breakdown strength of atmospheric air at N.T.P.?
[ESE-2007]



- A 0.3 kV/cm
- B 1.0 kV/cm
- C 3 kV/cm
- D 30 kV/cm

Q.



The corona loss on a particular system at 50 Hz is 1 kW/km per phase. What is the corona loss at 60 Hz in kW/km per phase? [ESE-2005]

A 0.83

B 1.0

C 1.13

D 1.12

$$P_c \propto (f + 25)$$

$$\frac{P_{c1}}{P_{c2}} = \frac{f_1 + 25}{f_2 + 25}$$

$$\frac{1}{P_{c2}} = \frac{50 + 25}{60 + 25}$$

$$P_{c2} = \frac{85}{75} = 1.13$$

Q.

Which one of the following statements is correct? Corona loss increases with
[ESE-2004]



- ☒ A decrease in conductor size and increase in supply frequency.
- ☐ B increase in both conductor size and supply frequency.
- ☐ C decrease in both conductor size and supply frequency.
- ☐ D increase in conductor size and decrease in supply frequency.

$$P_c \propto (f + 25)$$

$$P_c \propto \sqrt{\frac{\gamma}{d}} (V_p - V_D)^2$$

$$V_D \propto \gamma f$$

$$\gamma \downarrow \Rightarrow P_c \uparrow$$



#Q. Which one of the following is correct regarding reduction of corona loss?

[ESE-2024]

- A** Corona losses can be reduced by using large dia conductors, hollow conductors and bundled conductors
- B** Corona losses can be reduced by using small dia conductors, hollow conductors and bundled conductors
- C** Corona losses can be reduced by using large dia conductors, hollow conductors and single conductors
- D** Corona losses can be reduced by using large dia conductors, solid conductors and single conductors

#Q. Which one of the following statements is not correct?

- A** The corona loss on the middle conductor is more as compared with the two outer conductors.
- B** The corona loss is less in hilly areas than in plain areas. ✗
- C** The rains increase the corona loss in transmission lines.
- D** The height of the conductors from the ground has its effect on corona loss.



#Q. Which of the following factors affect Corona?

1. Atmospheric conditions, temperature, humidity, moisture, ice and fog
2. Current of conductor ✓
3. Waveform ✗
4. Condition of surface of conductors, smoothness and dust ✓

[ESE-2020]

A 1, 2 and 3 only

B 1, 3 and 4 only

C ✓ 1, 2 and 4 only

D 2, 3 and 4 only

#Q. Radio Influence Voltage (RIV) generated on a transmission line conductor surface is not affected by [ESE-2019]

- A** System voltage ✓
- B** Corona discharges on the conductors ✓
- C** Rain ✗
- D** Nearby radio receivers ✓

#Q. Which one of the following does not have an effect on corona?

[ESE-2017]

A Spacing between conductors ✓ D

B Conductor size ✓

C Line voltage ✓

D Length of conductor ✗

#Q. Consider the following statements regarding corona :

1. It causes radio interference. ✓
2. It attenuates lightning surges. ✓
3. It causes power loss. ✓
4. ✓ It is more prevalent in the middle conductor of a transmission line employing flat conductor configuration.

Which of the above statements are correct?


[ESE-2017]

A 1, 2 and 3 only

B 1, 2 and 4 only

C ✓ 1, 2, 3 and 4

D 3 and 4 only

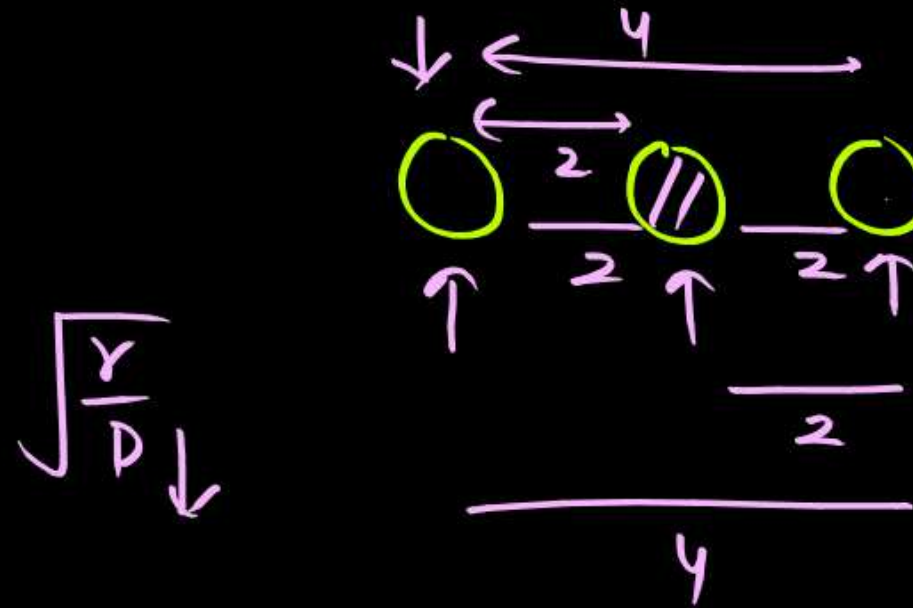



2 Minutes Summary

→ Corona — Advantage
 \ Disadvantage

→ Question.


Thank you

GW
Soldiers !



Electrical Engineering

Power System

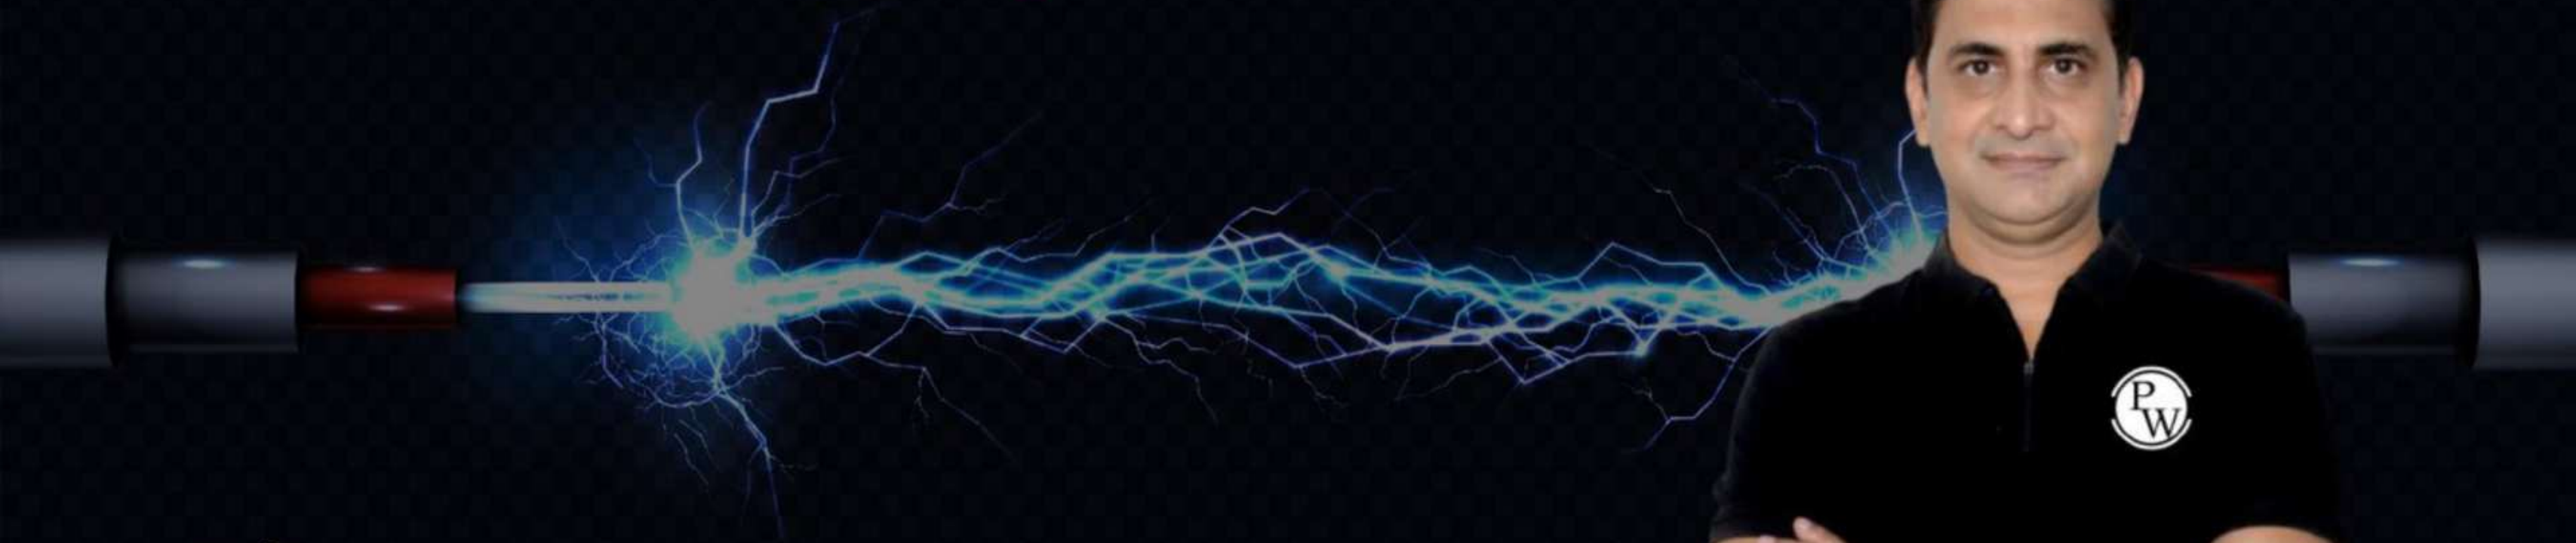

Lecture No.-3

Corona

By- Ajay Gupta Sir




Recap Of previous class

- ✓ 1. corona
- ✓ 2. Factor affecting corona
- ✓ 3. Advantage and disadvantage



Topics to be Covered

- ✓ 1. Electromagnetic induction
- ✓ 2. Electrostatic induction
- ✓ 3. rectification
- ✓ 4. questions

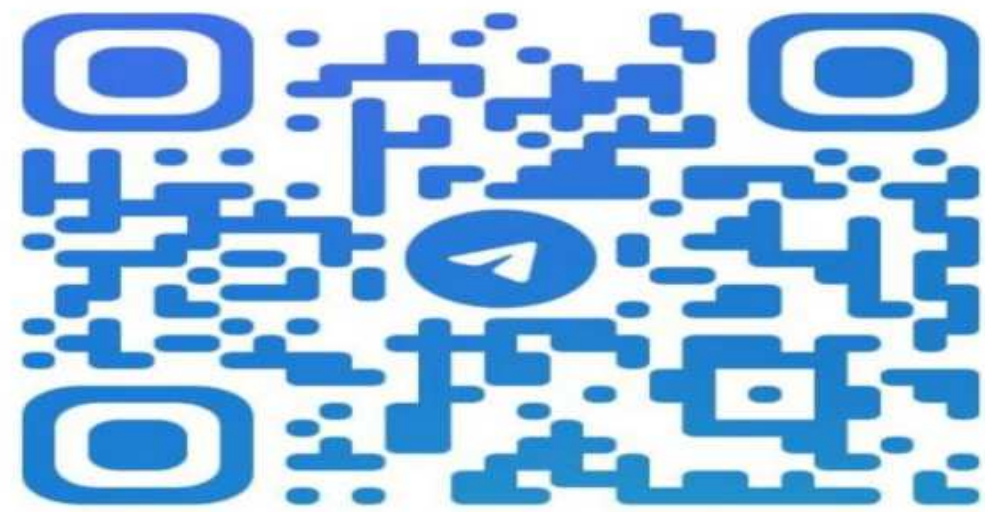


@AJAYGUPTASIRPW

Interference Between Power & Communication Line




- Normally power & communication line exist in close proximity, so power line create interference with communication.
- Interference occur due to
 - Electromagnetic Induction (Due to Magnetic field)
 - Electrostatic Induction (Due to electric field)


- Electromagnetic induction induce current in communication line. The current superimposed with speech current (Signal) and create disturbance. PW

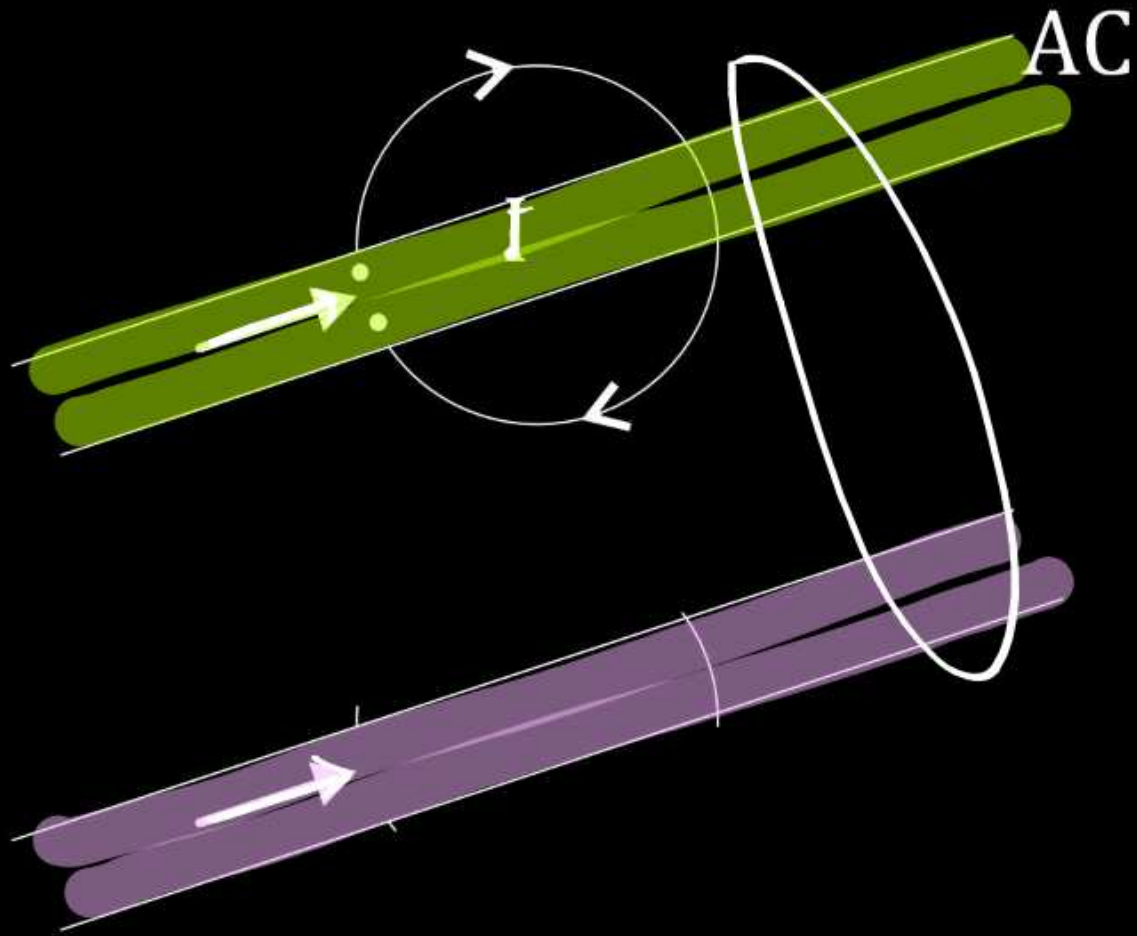

- Electrostatic induction raise the potential of communication line, thereby endangering equipment & users.

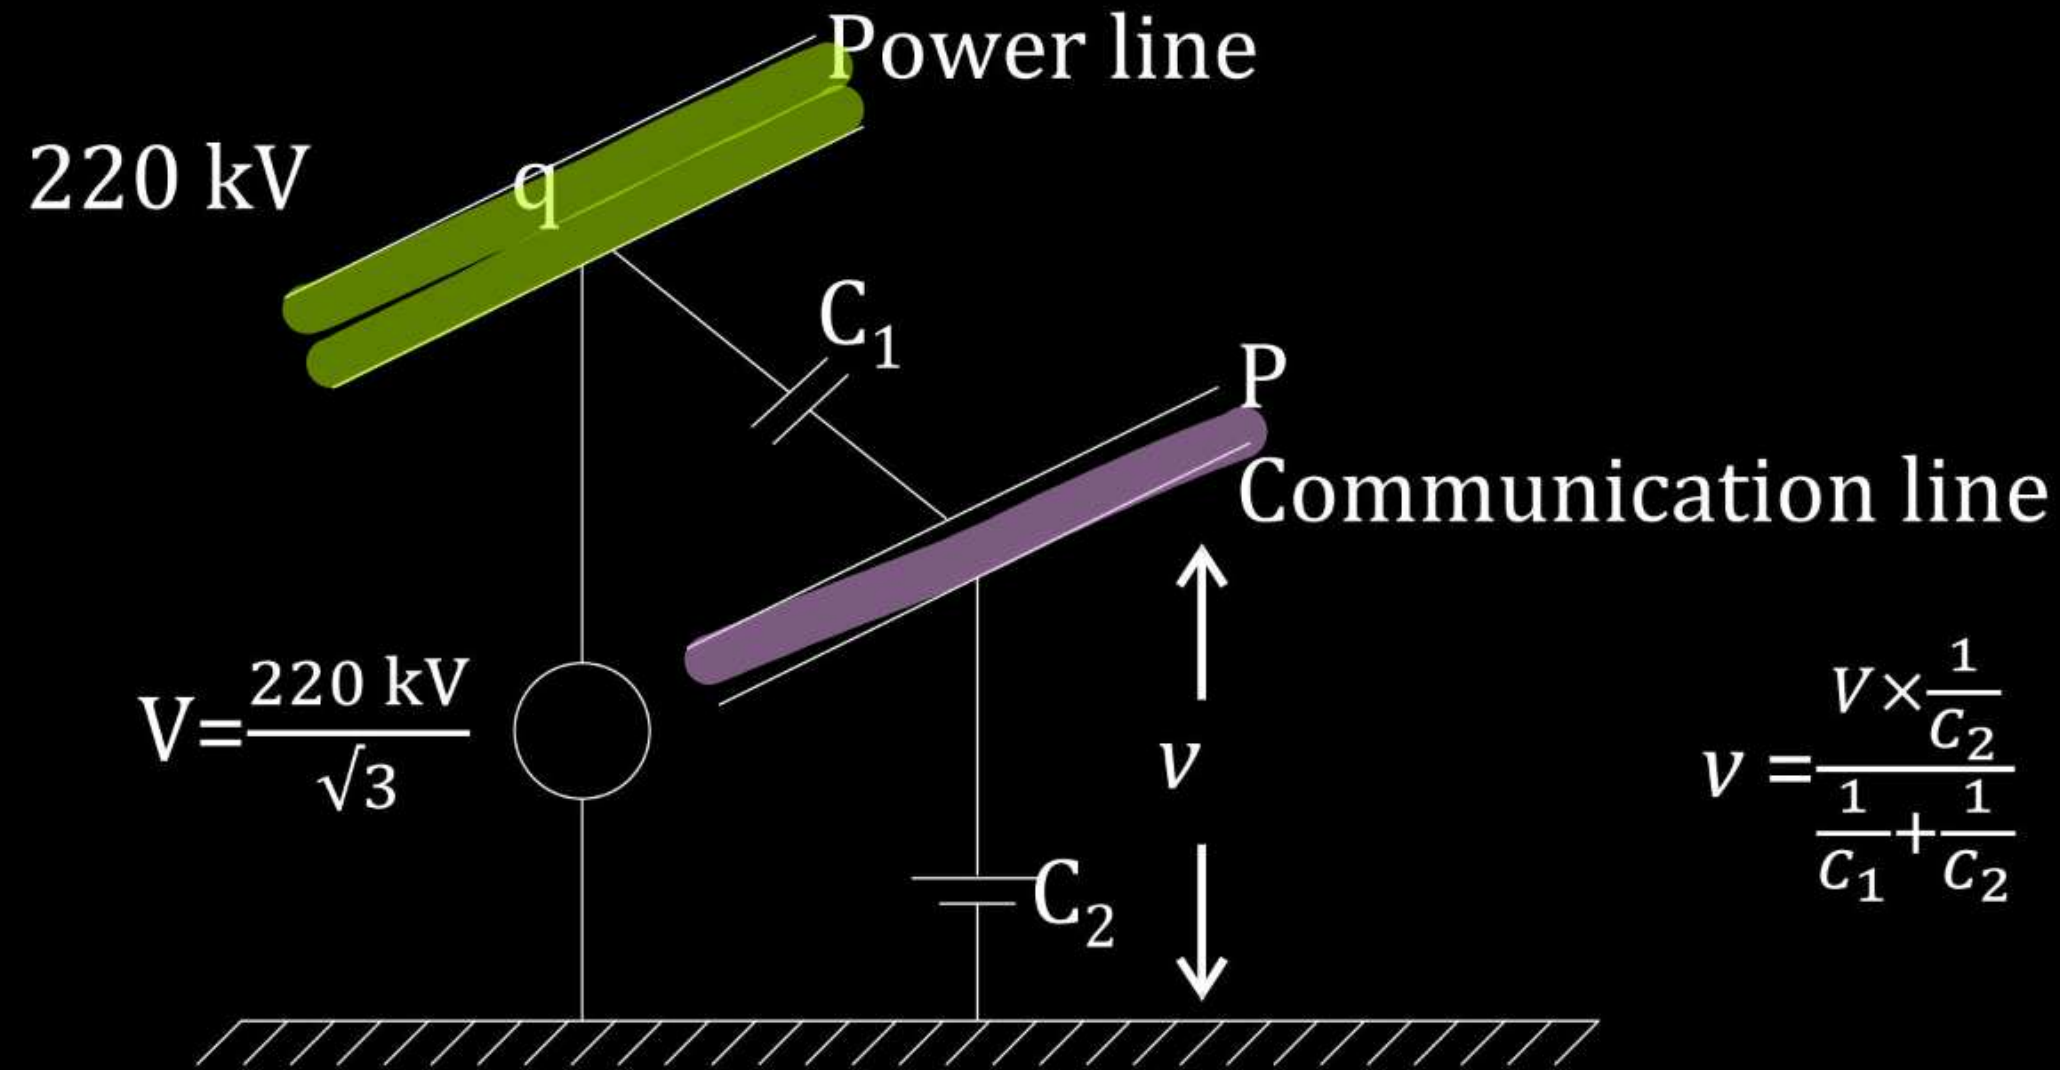

➤ Electromagnetic Induction:

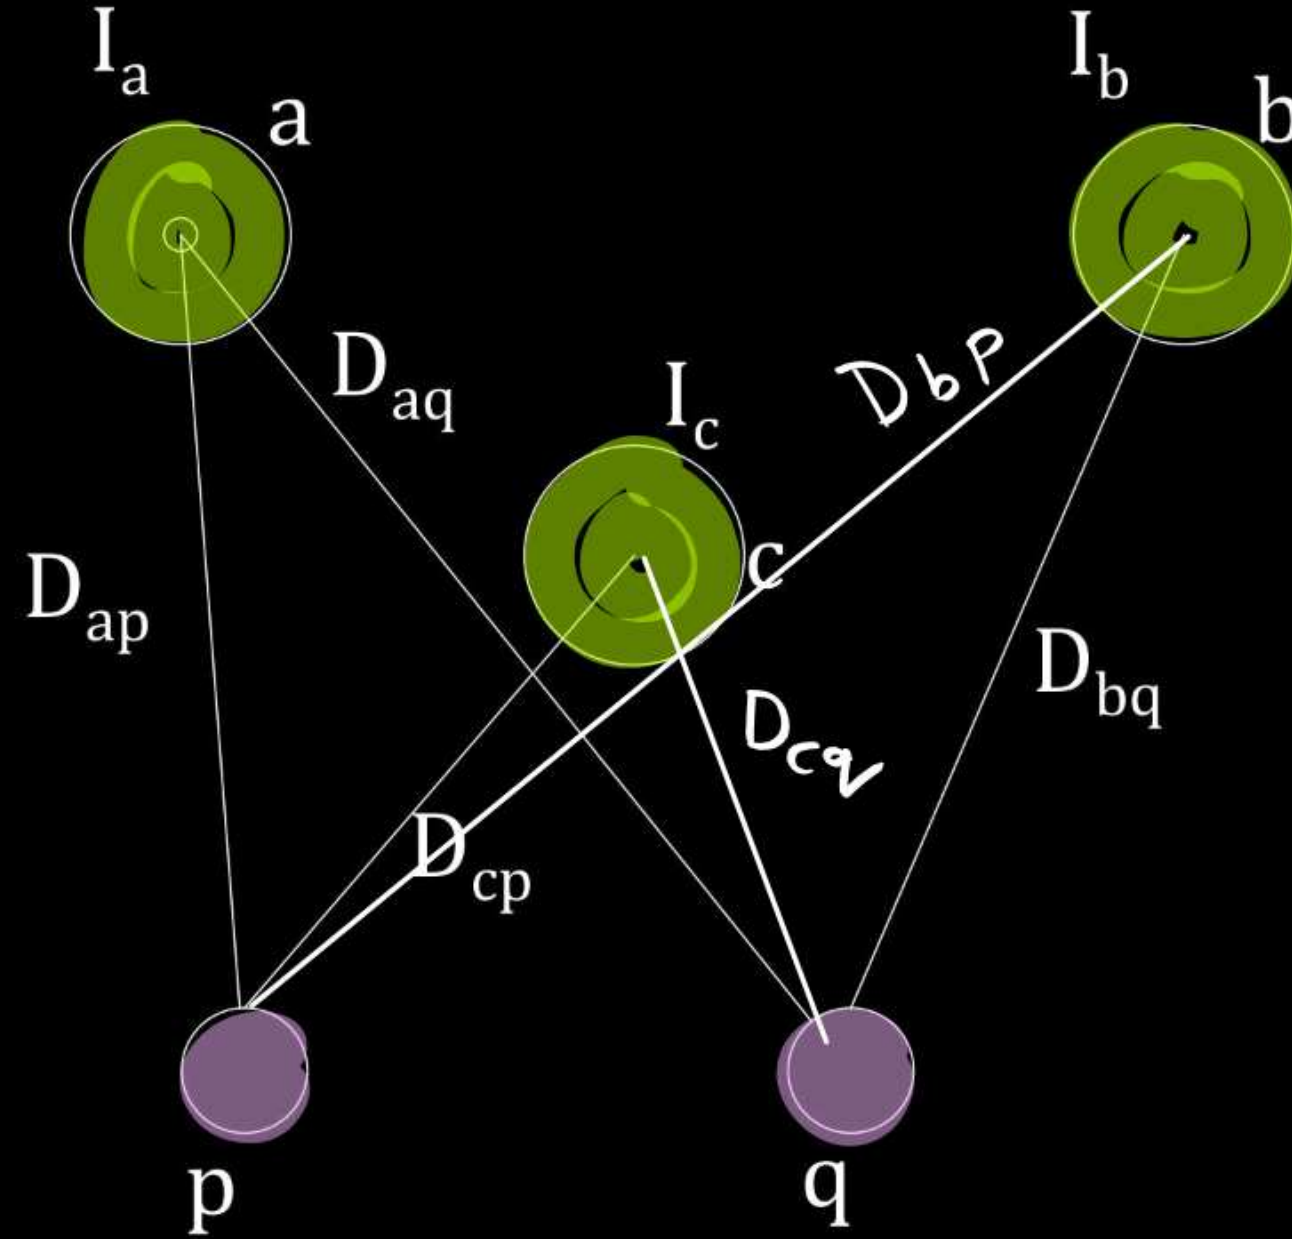

$$I_a + I_b + I_c = 0$$

When current flow in T. L.



A time varying magnetic Flux is Inducted around the power line.



This magnetic field induced the EMF in the communication line and due to this emf, The Induced current start flowing in communication line

$$\psi_j = 2 \times 10^{-7} \sum_{k=1}^n I_k \ln \frac{1}{D_{jk}}$$

Flux linkage of conductor P (Communicated line)



$$\psi_p = 2 \times 10^{-7} I_a \ln \frac{1}{D_{ap}} + 2 \times 10^{-7} I_b \ln \frac{1}{D_{bp}} + 2 \times 10^{-7} I_c \ln \frac{1}{D_{cp}}$$

$$\psi_p = 2 \times 10^{-7} \left[I_a \ln \frac{1}{D_{ap}} + I_b \ln \frac{1}{D_{bp}} + I_c \ln \frac{1}{D_{cp}} \right] \quad - (1)$$

FLUX LINKAGE of CONDUCTOR Q

$$\psi_q = 2 \times 10^{-7} \left[I_a \ln \frac{1}{D_{aq}} + I_b \ln \frac{1}{D_{bq}} + I_c \ln \frac{1}{D_{cq}} \right] \quad - (2)$$

Flux linkage between P and q Conductor

$$\psi = \psi_p - \psi_q$$

$$\psi = 2 \times 10^{-7} \left[I_a \ln \frac{1}{D_{ap}} - I_a \ln \frac{1}{D_{aq}} + I_b \ln \frac{1}{D_{bp}} - I_b \ln \frac{1}{D_{bq}} + I_c \ln \frac{1}{D_{cp}} - I_c \ln \frac{1}{D_{cq}} \right]$$

$$\psi_p - \psi_q = \psi = 2 \times 10^{-7} \left[I_a \ln \frac{D_{aq}}{D_{ap}} + I_b \ln \frac{D_{bq}}{D_{bp}} + I_c \ln \frac{D_{cq}}{D_{cp}} \right]$$

➤ Since flux linkage is changing w.r.t time, so as per faraday law, EMF is induced. 

$$e = -\frac{d\psi}{dt}$$

$$e = \frac{-d}{dt} [\psi_m \sin \omega t]$$

$$\underline{e} = -\psi_m \omega \cos \omega t = \underline{\psi_m} \omega \sin\left(\omega t + \frac{\pi}{2}\right)$$

$$\underline{\text{RMS value}} = E = \frac{\psi_m \omega}{\sqrt{2}}$$

$$E = 2\pi f \frac{\psi_m}{\sqrt{2}}$$

$$\psi = \frac{\psi_m}{\sqrt{2}}$$

$$\underline{E} = 2\pi f \underline{\psi}$$

Induced EMF in p and q conductor

$$E_{pq} = E_p - E_q$$

$$= 2\pi t \psi_p - 2\pi t \psi_q$$


$$E_{pq} = 2\pi t [\psi_p - \psi_q] = 2\pi t \psi$$




$$E_{pq} = 2\pi t \psi$$

Where $\psi = 2 \times 10^{-7} \left[I_a \ln \frac{D_{aq}}{D_{ap}} + I_b \ln \frac{D_{bq}}{D_{bp}} + I_c \ln \frac{D_{cq}}{D_{cp}} \right]$

➤ Balance Current:

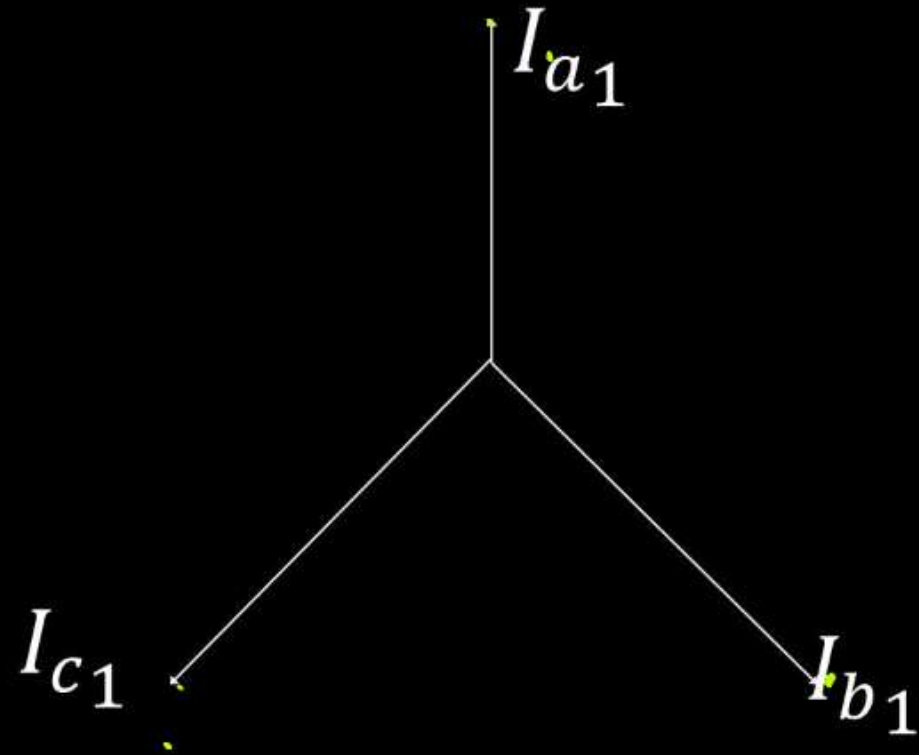


Positive sequence
 $I_{a_1} + I_{b_1} + I_{c_1} = 0$

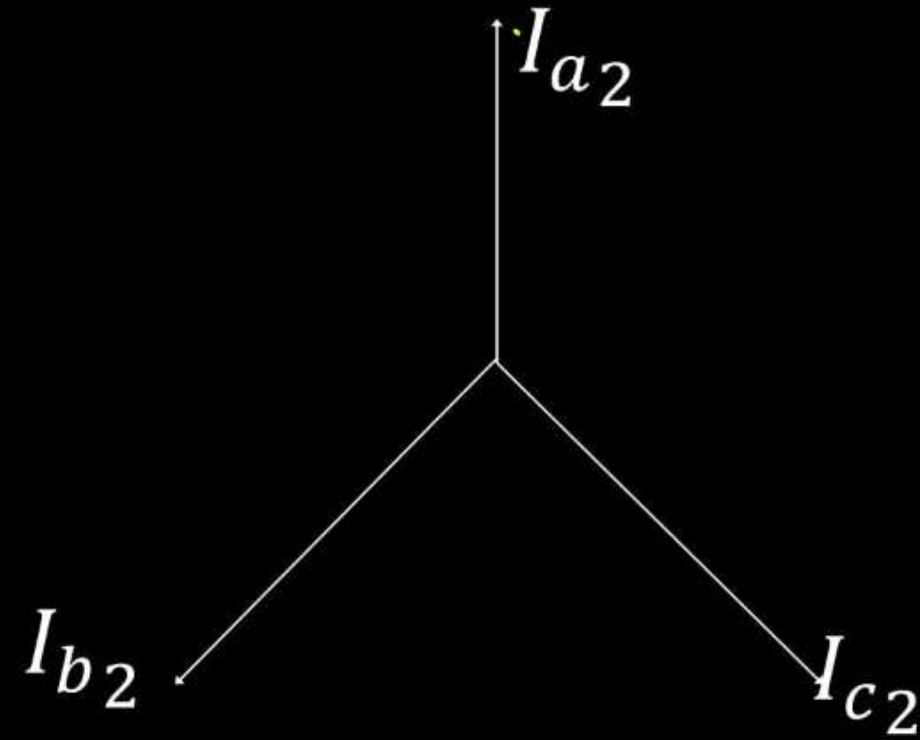

Negative sequence
 $I_{a_2} + I_{b_2} + I_{c_2} = 0$

➤ In case of balance current the net flux linkage is very small (almost zero)

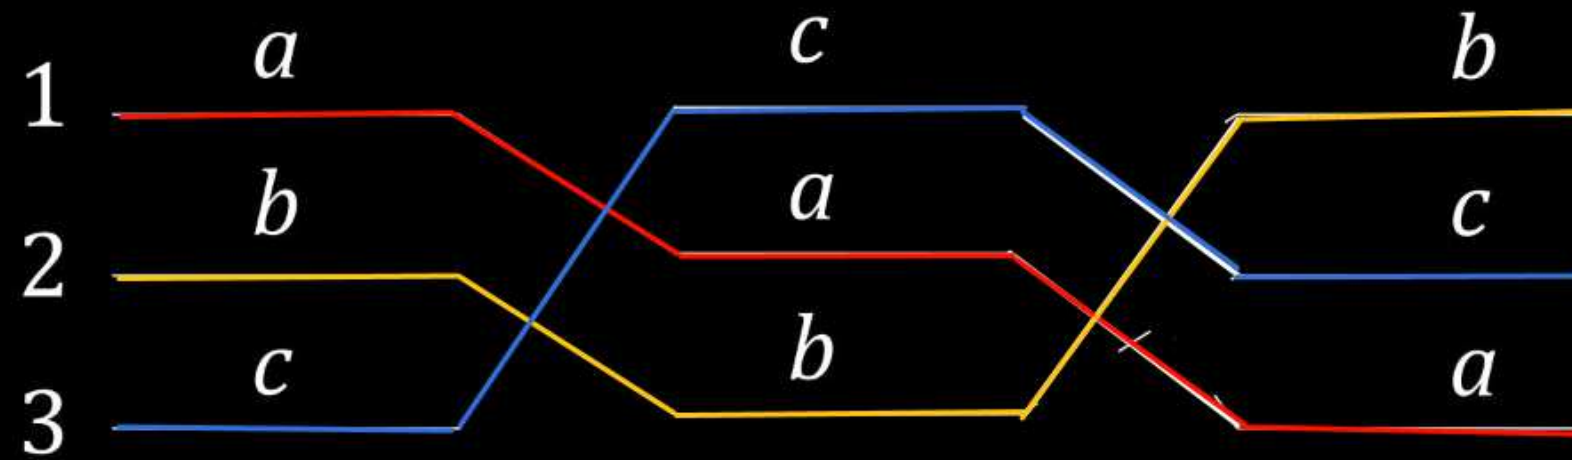


In complete transposition

$$D_{ap} = D_{bp} = D_{cp}$$

$$D_{aq} = D_{bq} = D_{cq}$$

$$\ln\left(\frac{D_{aq}}{D_{ap}}\right) = \ln\left(\frac{D_{bq}}{D_{bp}}\right) = \ln\left(\frac{D_{cq}}{D_{cp}}\right) = K$$

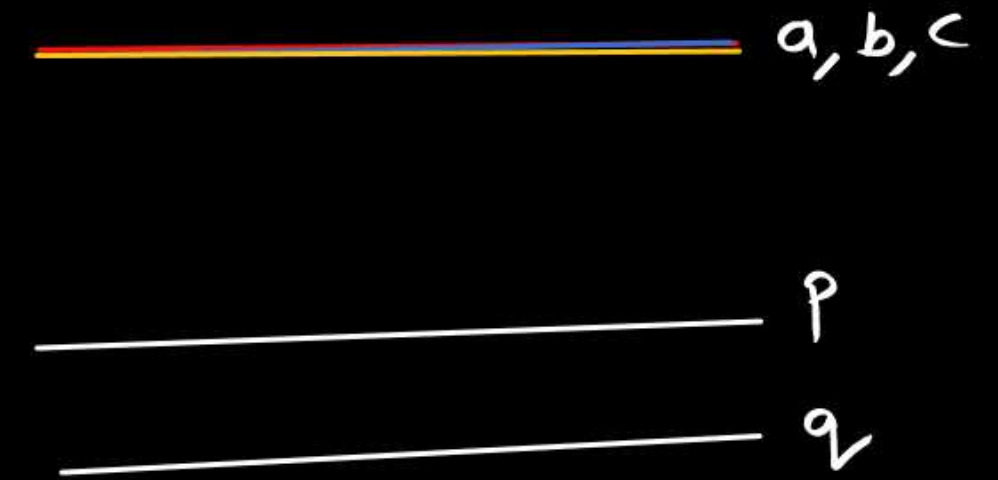

$$\psi = 2 \times 10^{-7} \left[I_a \ln \frac{D_{aq}}{D_{ap}} + I_b \ln \frac{D_{bq}}{D_{bp}} + I_c \ln \frac{D_{cq}}{D_{cp}} \right]$$

$$\psi = 2 \times 10^{-7} [I_a k + I_b k + I_c k]$$

$$\psi = 2 \times 10^{-7} k [I_a + I_b + I_c]$$

For positive and negative seq. $(I_a + I_b + I_c)$


$$\psi = 0$$

$$E = 2\pi f \psi = 0$$

Unbalance Current



- But during unbalancing condition like (L – G) fault or due to corona the 3rd harmonic current flow (Zero Seq)

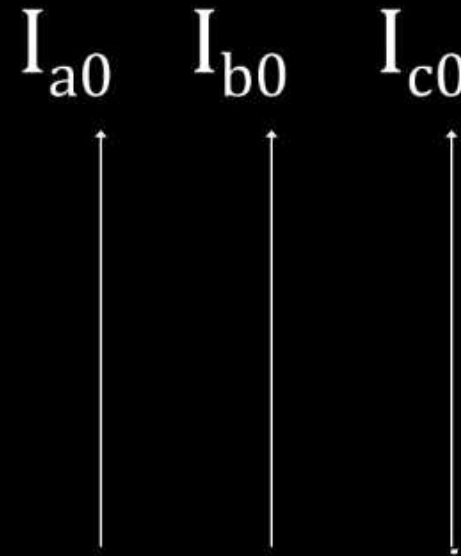

$$I_{a0} = I_{b0} = I_{c0}$$

Even if power line is transposed,

$$\psi = 2 \times 10^{-7} \text{ k} [I_{a0} + I_{b0} + I_{c0}]$$

$$\psi = 2 \times 10^{-7} \text{ k} (3I_{a0})$$

$$\psi = 3\psi \text{ (3 times of } 1\phi \text{ flux)}$$

$$E = 2\pi t \ 4$$

$$E = 2\pi (3t) (34)$$


$$E = 9 \text{ times. of } 1\phi$$


$$50 \text{ Hz} \times 3 = 150 \text{ Hz}$$

The high frequency is also in audible range, so it should be eliminated.




- So to eliminate current due to unbalance current the communication line should also transposed.

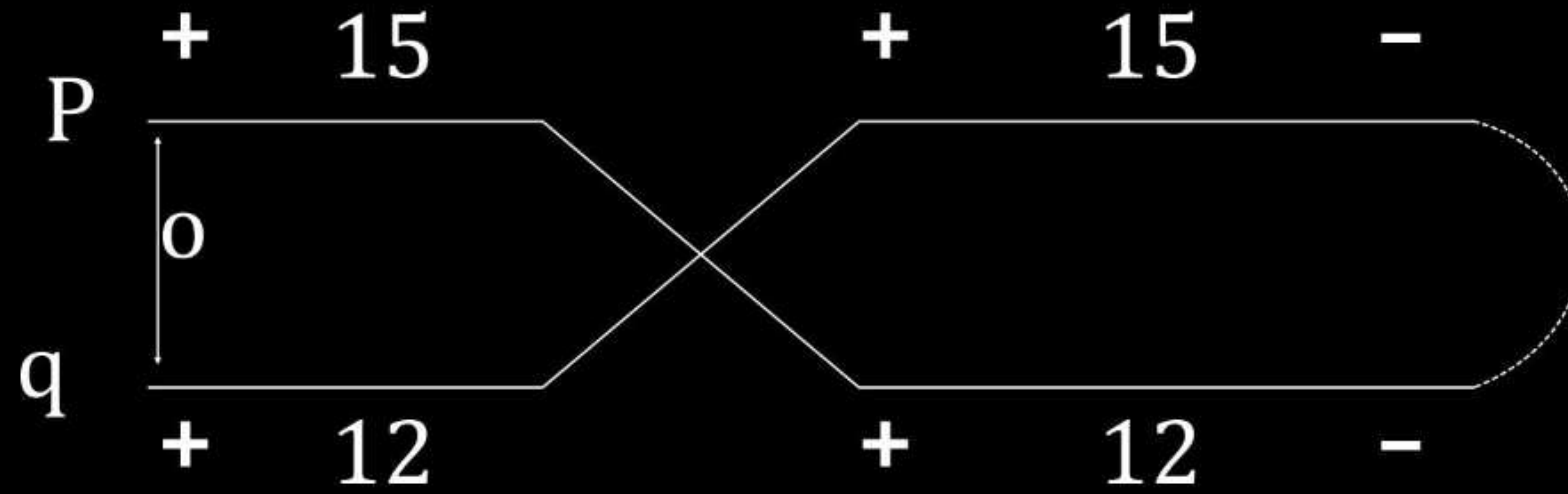

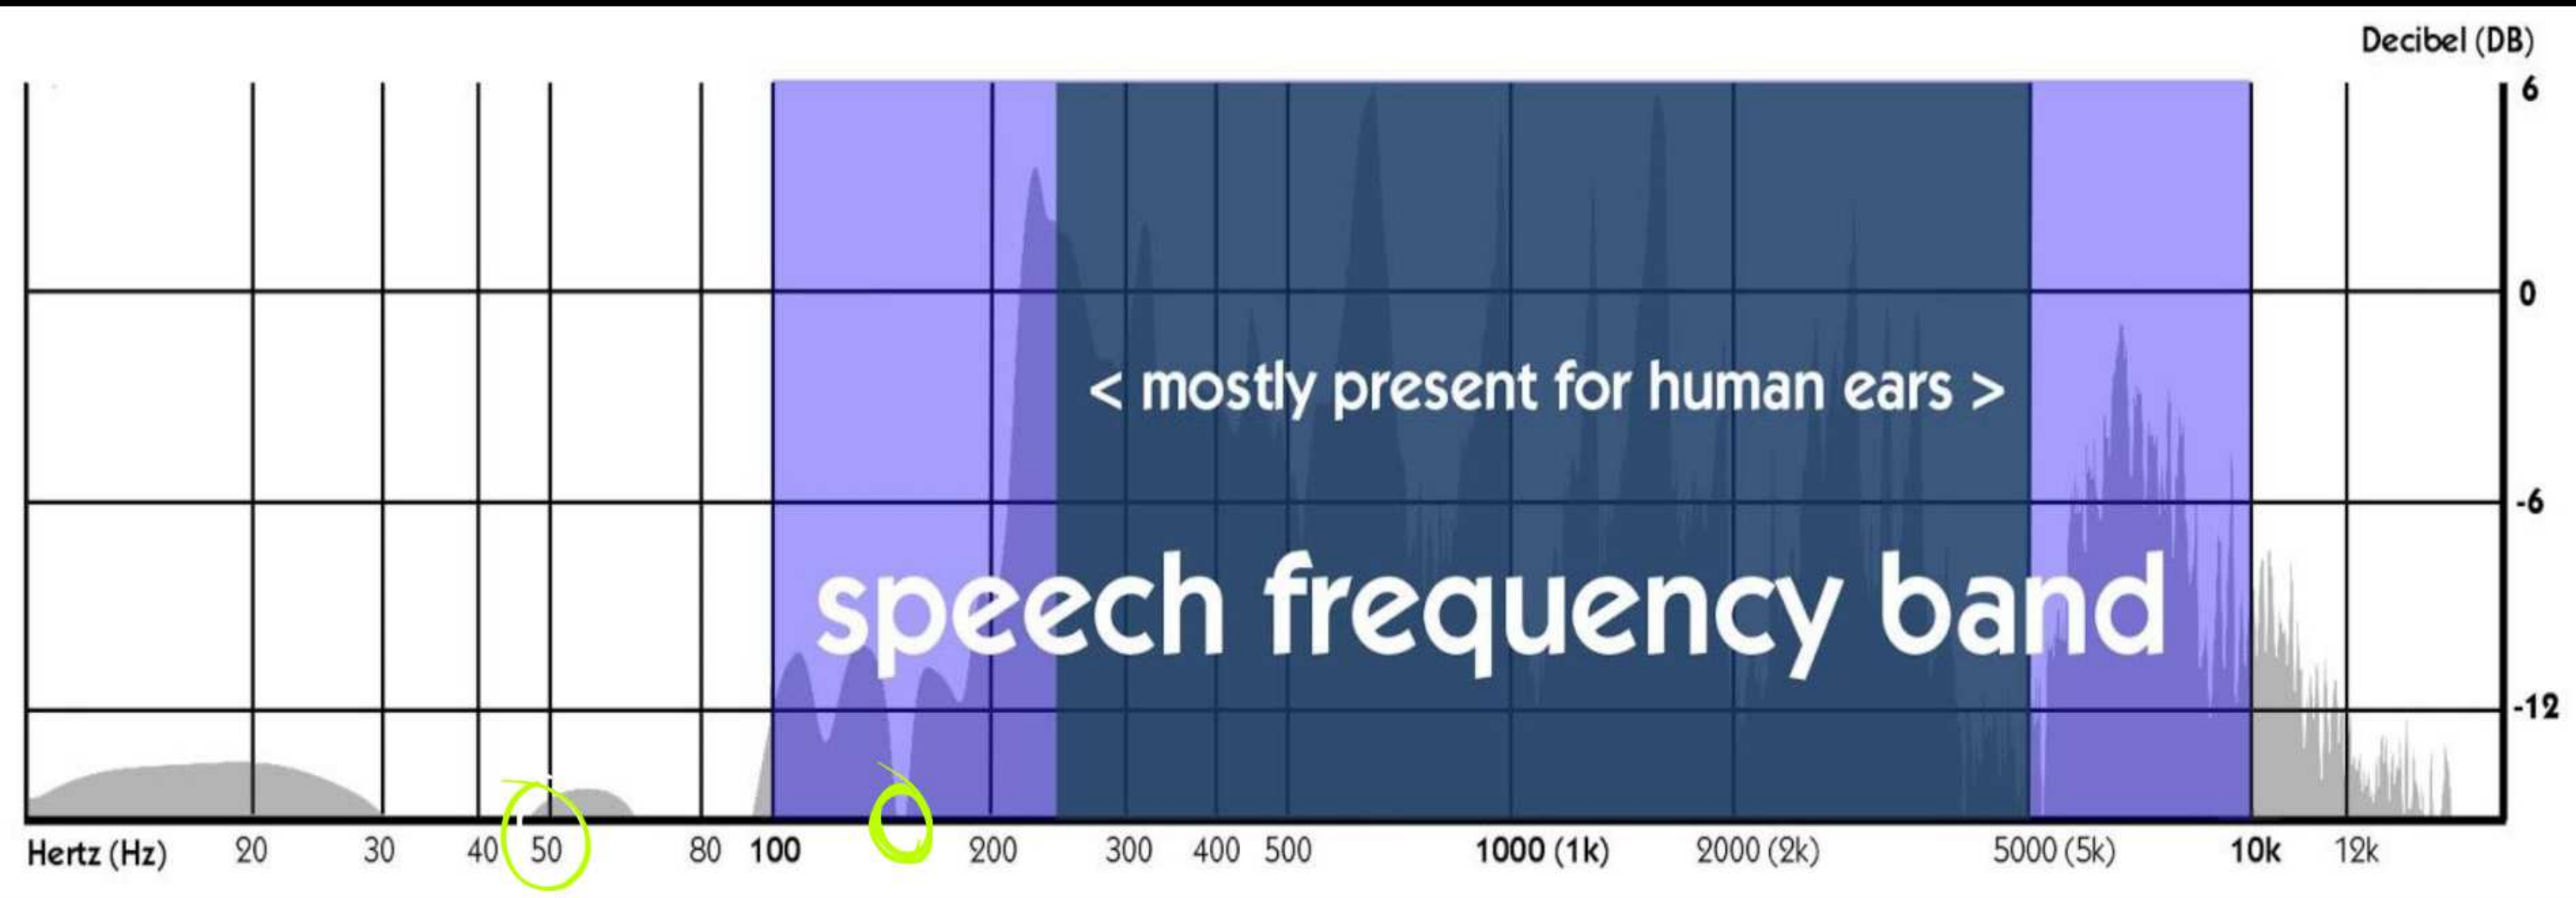

- #Q. A 3 phase 11 kV 50 Hz feeder has horizontal configuration with 1.2 m between adjacent conductors. The height of the conductors above ground is 10m. A telephone line is run on the same supports. The horizontal distance between the telephone wires is 0.6m. The vertical distance between the power line and the telephone line is 1m. Find the magnitude of the voltage induced in the telephone circuit due to electromagnetic induction if the power line carries a balanced current of 300 amperes.

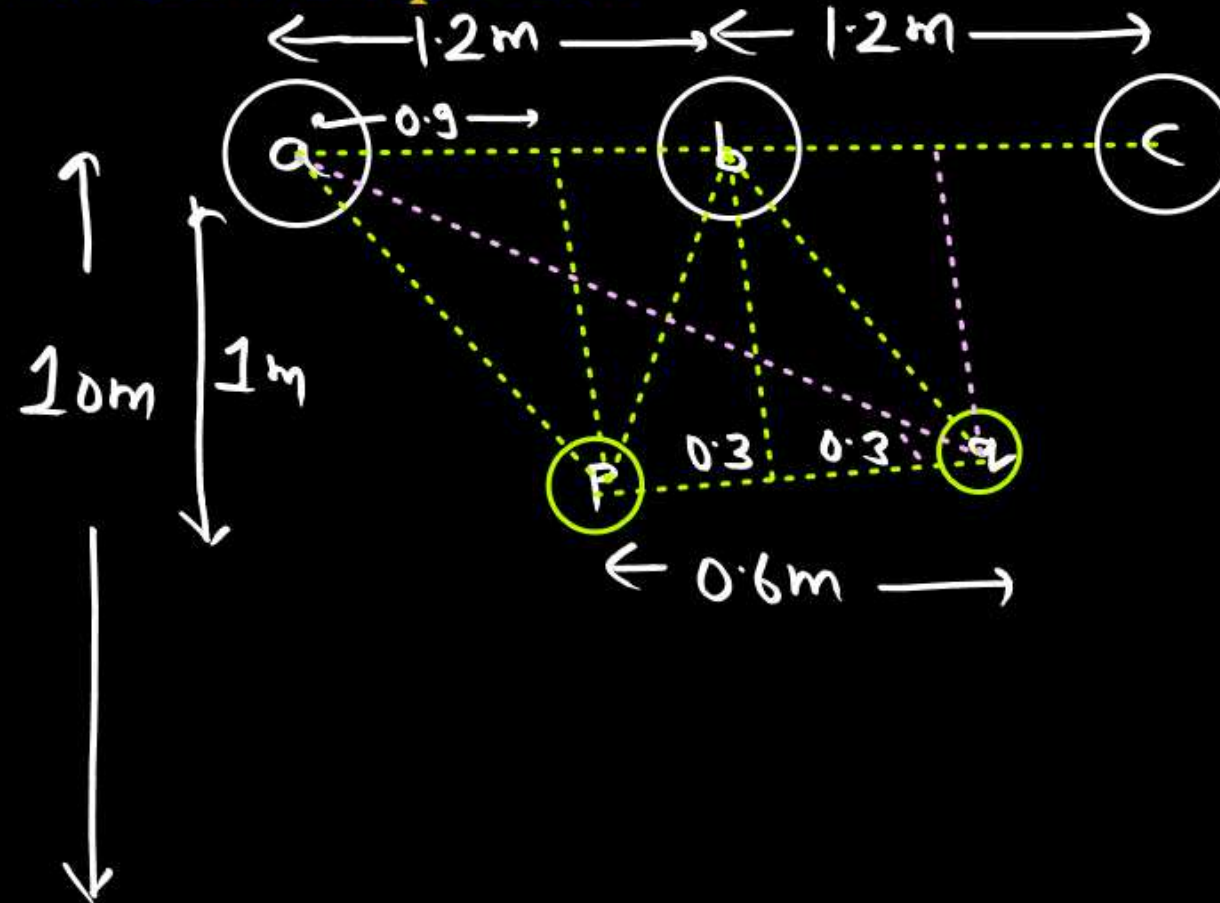

$$D_{ap} = D_{cq} = \sqrt{1^2 + 0.9^2} = 1.345$$

$$D_{bp} = D_{bq} = \sqrt{1^2 + 0.3^2} = 1.044$$

$$D_{aq} = D_{cp} = \sqrt{1.5^2 + 1^2} = 1.803$$

$$\psi = 2 \times 10^{-7} \left[I_a \ln \frac{D_{aq}}{D_{ap}} + I_b \ln \frac{D_{bq}}{D_{bp}} + I_c \ln \frac{D_{cq}}{D_{cp}} \right]$$

$$\psi = 2 \times 10^{-7} \left[(300 \angle 0) \ln \frac{1.803}{1.345} + (300 \angle -120) \ln \underbrace{\frac{1.044}{1.044}}_{\ln 1 = 0} + (300 \angle -240) \ln \frac{1.345}{1.803} \right]$$

$$\psi = 2 \times 10^{-7} \left[(300 \angle 0)(0.293) + (300 \angle -240)(-0.293) \right]$$

$$\psi = (304.55 \angle -30) \times 10^{-7}$$



$$E = 2\pi f \psi$$

$$E = 100\pi (304.55 \angle -30) \times 10^{-7}$$

$$E = 9.57 \times 10^{-3} \text{ V}$$

#Q. Calculate the voltage induced due to electromagnetic induction in the telephone line of last question under the condition of a single line to earth fault on phase a if the fault current is 2000 amperes.

$$I_a = 2000 \quad I_b = I_c = 0$$

$$\psi = 2 \times 10^{-7} I_a \ln \frac{D_{aa}}{D_{ap}}$$

$$\psi = (2 \times 10^{-7}) (2000) \ln \frac{1.803}{1.345}$$

$$\psi = 1172.23 \times 10^{-7}$$

$$E = 2\pi f \psi$$


$$= 100 \pi \times 1172.23 \times 10^{-7}$$

$$E = 0.0368 \text{ V/m}$$

Electrostatic Induction:



The charge is induced in a nearly conducting material due to electrical field.

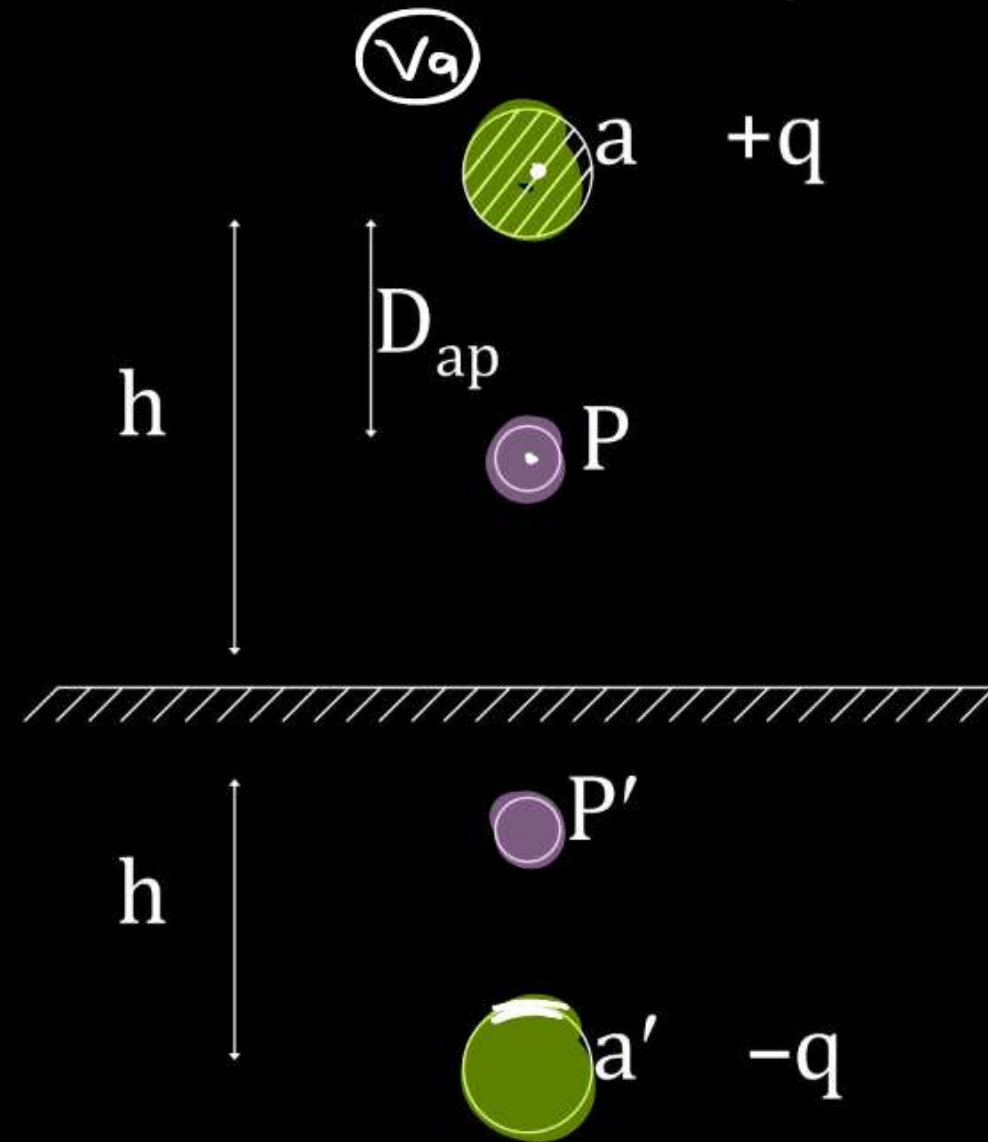


The potential of a with respect to ground

$$V_{ag} = \frac{q_v}{2\pi\epsilon} \ln \frac{h}{r} + \frac{(-q_v)}{2\pi\epsilon} \ln \frac{h}{(2h-r)}$$

$$V_{ag} = \frac{q_v}{2\pi\epsilon} \ln \frac{\cancel{h}}{r} \cdot \frac{(2h-r)}{\cancel{h}}$$

$$V_{ag} = \frac{q_v}{2\pi\epsilon} \ln \frac{(2h-r)}{r}$$

$$\frac{q_v}{2\pi\epsilon} = \frac{V_a}{\ln \left(\frac{2h-r}{r} \right)} \quad - (1)$$

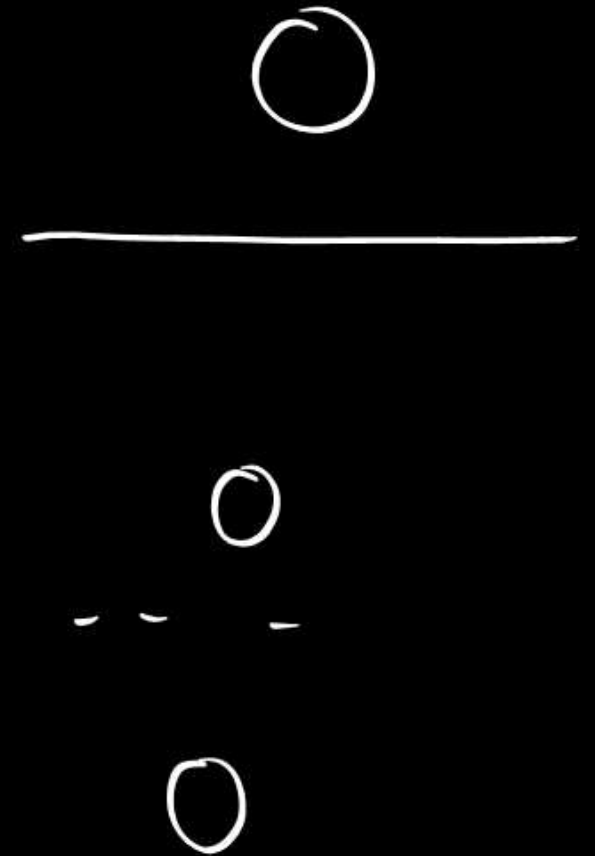

The potential of P with respect to ground

$$V_{Pg} = \frac{q}{2\pi\epsilon} \ln \frac{h}{D_{ap}} + \frac{(-q)}{2\pi\epsilon} \ln \frac{h}{2h-D_{ap}}$$

$$V_P = \frac{q}{2\pi\epsilon} \left[\ln \frac{h}{D_{ap}} - \ln \frac{h}{2h-D_{ap}} \right]$$

$$V_P = \frac{q}{2\pi\epsilon} \ln \frac{\cancel{h}}{D_{ap}} \cdot \frac{2h-D_{ap}}{\cancel{h}} = \frac{q}{2\pi\epsilon} \ln \frac{2h-D_{ap}}{D_{ap}}$$

$$\underline{V_{P(a)}} = \underline{V_a} \frac{\ln \left(\frac{2h - D_{ap}}{D_{ap}} \right)}{\ln \left(\frac{2h - r}{r} \right)}$$

Voltage Induced in P

Conductor due to phase a Conductor

— Similarly voltage induced in P conductor due to phase b Conductor

$$\underline{V_{P(b)}} = \underline{V_b} \frac{\ln \left(\frac{2h - D_{bp}}{D_{bp}} \right)}{\ln \left(\frac{2h - r}{r} \right)}$$

— Voltage induced in p conductor due to c phase


$$V_{P(c)} = V_c \frac{\ln \left(\frac{2h - D_{cp}}{D_{cp}} \right)}{\ln \left(\frac{2h - r}{r} \right)}$$

So total potential of P

$$V_P = V_{P(a)} + V_{P(b)} + V_{P(c)}$$

- The transposition of power line neutralized the unbalance in capacitance. So electrically induced voltage are neutralized in complete set of transposition.

$$D_{aP} = D_{bP} = D_{cP}$$

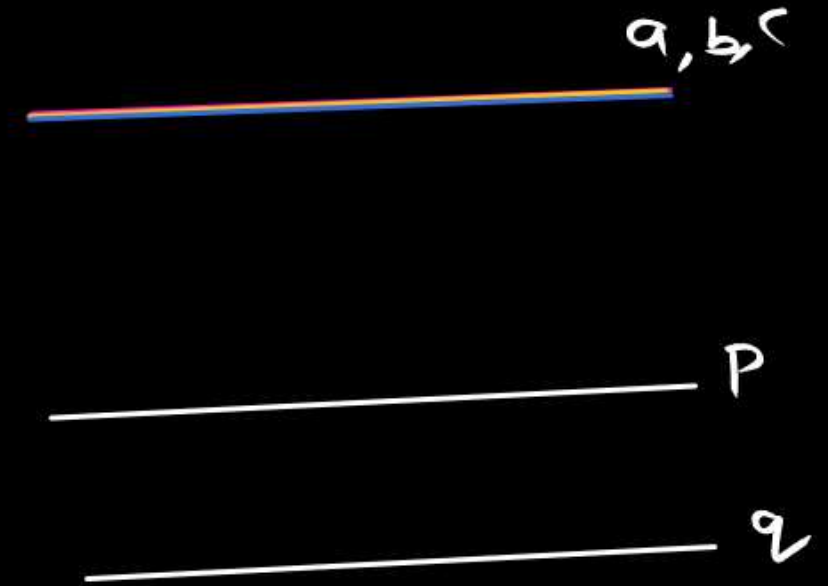



$$\frac{\ln\left(\frac{2h-D_{aP}}{D_{aP}}\right)}{\ln\left(\frac{2h-r}{r}\right)} = \frac{\ln\left(\frac{2h-D_{bP}\checkmark}{D_{bP}}\right)}{\ln\left(\frac{2h-r}{r}\right)} = \frac{\ln\left(\frac{2h-D_{cP}}{D_{cP}}\right)}{\ln\left(\frac{2h-r}{r}\right)} = k$$

$$V_P = V_{P(a)} + V_{P(b)} + V_{P(c)}$$

$$V_P = V_a k + V_b k + V_c k$$

$$= k[\bar{V}_a + \bar{V}_b + \bar{V}_c]$$

$$(V_P = 0)$$



- However, a voltage due to electrostatic induction will still exist between communication line & ground, so insulator of communication line should be able to withstand it.



#Q. A 3 phase 11 kV 50 Hz feeder has horizontal configuration with 1.2 m between adjacent conductors. The height of the conductors above ground is 10m. A telephone line is run on the same supports. The horizontal distance between the telephone wires is 0.6m. The vertical distance between the power line and the telephone line is 1m. Find the magnitude of the voltage induced in the telephone circuit due to electrostatic induction if the diameter is 14.15 mm each

$$V_{P(a)} = V_q \frac{\ln\left(\frac{2h - D_{ap}}{D_{ap}}\right)}{\ln\left(\frac{2h - r}{r}\right)} = \frac{11000}{\sqrt{3}} \angle 0^\circ \frac{\ln\left(\frac{20 - 1.345}{1.345}\right)}{\ln\left(\frac{20 - 0.7075 \times 10^{-2}}{0.7075 \times 10^{-2}}\right)} = 2101 \angle 0^\circ$$

Similarly $V_{P(b)} = 2317 \angle -120$

$$V_{P(c)} = 1847 \angle -240$$

$$V_P = V_{P(a)} + V_{P(b)} + V_{P(c)}$$

$$= 2101 \angle 0 + 2317 \angle -120 + 1847 \angle -240$$

$$= 404.47 \angle -87.32$$



2 Minutes Summary

→ Interference with Communication line $\left\{ \begin{array}{l} \text{Electromagnetic} \\ \text{Electrostatic} \end{array} \right.$

Thank you

GW
Soldiers !

